


NI8U-S12-AP6X-H1141 Inductive Sensor

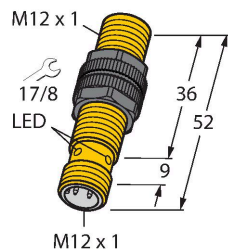



Features

- Threaded barrel, M12 x 1
- Plastic, PBT-GF30
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Extended temperature range
- High switching frequency
- Auto-compensation protects against pre-damping
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

Technical data

Type	NI8U-S12-AP6X-H1141
ID	1644600
General data	
Rated switching distance	8 mm
Mounting conditions	Non-flush, partially embeddable
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Repeat accuracy	$\leq 2 \%$ of full scale
Temperature drift	$\leq \pm 10 \%$
	$\leq \pm 20 \%, \leq -25 \text{ °C} \vee \geq +70 \text{ °C}$
Hysteresis	3...15 %
Electrical data	
Operating voltage U_B	10...30 VDC
Ripple U_{ss}	$\leq 10 \%$ U_{Bmax}
DC rated operating current I_o	≤ 200 mA
No-load current	≤ 25 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	≤ 1.8 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
DC field stability	300 mT
AC field stability	300 mT _{ss}
Insulation class	□

Wiring diagram

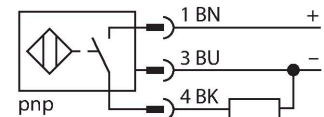

Functional principle


Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox Factor 1 sensors have significant advantages due to their patented ferrite-coreless multi-coil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.


Technical data


Switching frequency	1 kHz
Mechanical data	
Design	Threaded barrel, M12 x 1
Dimensions	52 mm
Housing material	Plastic, PBT-GF30
Active area material	Plastic, PA12-GF30
Max. tightening torque of housing nut	1 Nm
Electrical connection	Connector, M12 x 1
Environmental conditions	
Ambient temperature	-30...+85 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description

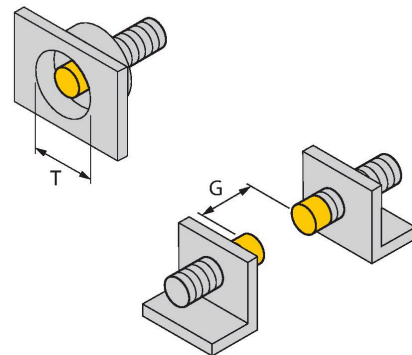This diagram shows two views of the threaded barrel component. The top view shows a square flange with a central hole and a threaded barrel extending from it. Dimension T is indicated as the distance from the center of the hole to the edge of the flange. The bottom view shows the barrel being inserted into a hole in a plate. Dimension G is indicated as the distance from the center of the barrel to the edge of the plate.

This diagram shows a side view of the threaded barrel component. The barrel is shown inserted into a hole in a plate. Dimension T is indicated as the distance from the center of the hole to the edge of the flange. Dimension G is indicated as the distance from the center of the barrel to the edge of the plate.

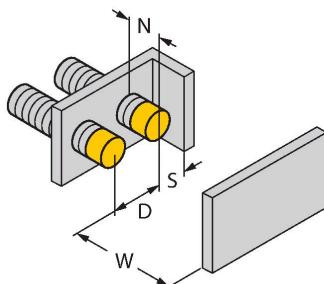
This diagram shows a side view of the threaded barrel component. The barrel is shown inserted into a hole in a plate. Dimension N is indicated as the distance from the center of the barrel to the edge of the plate. Dimension S is indicated as the distance from the center of the barrel to the edge of the flange. Dimension D is indicated as the distance from the center of the barrel to the edge of the plate. Dimension W is indicated as the distance from the center of the barrel to the edge of the flange.

Distance D	$3 \times B$
Distance W	$3 \times S_n$
Distance T	45 mm
Distance S	$0.5 \times B$
Distance G	$6 \times S_n$
Distance N	$2 \times S_n$
Diameter active area B	$\varnothing 12 \text{ mm}$

1-side flush mounting possible:
1-side flush mounting: $S_r = 6 \text{ mm}$


Accessories

QM-12 6945101




Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M16 × 1. Note: The switching distance of the proximity switches may change when using quick-mount brackets.

BST-12B 6947212




Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6

MW12 6945003

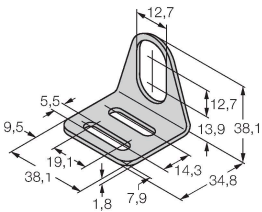

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

BSS-12 6901321



Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

Wiring accessories

Dimension drawing	Type	ID
	RKC4T-2/TEL	6625010



Connection cable, M12 female connector, straight, 3-pin, cable length: 2 m, jacket material: PVC, black; cULus approval