


# NI20U-M30-AP6X Inductive Sensor

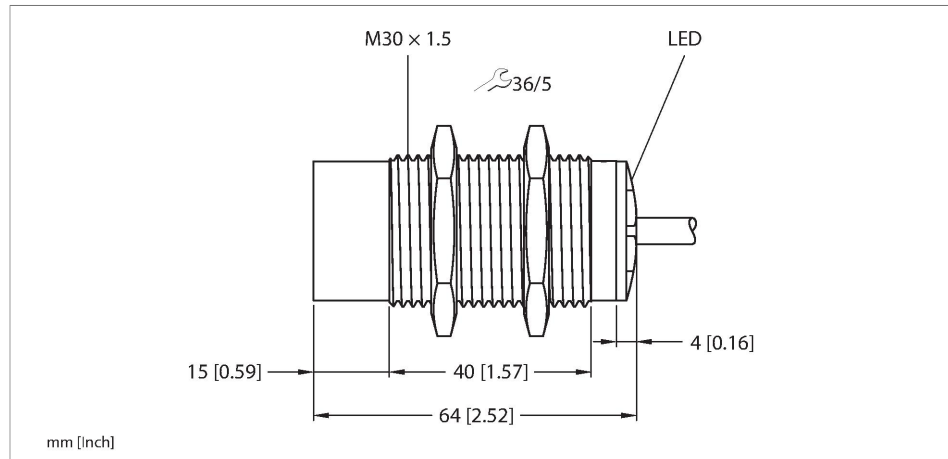


## Technical data

|                                        |                                                                                            |
|----------------------------------------|--------------------------------------------------------------------------------------------|
| Type                                   | NI20U-M30-AP6X                                                                             |
| ID                                     | 1646100                                                                                    |
| General data                           |                                                                                            |
| Rated switching distance               | 20 mm                                                                                      |
| Mounting conditions                    | Non-flush                                                                                  |
| Secured operating distance             | $\leq (0.81 \times S_n)$ mm                                                                |
| Repeat accuracy                        | $\leq 2 \%$ of full scale                                                                  |
| Temperature drift                      | $\leq \pm 10 \%$                                                                           |
|                                        | $\leq \pm 15 \%, \leq -25 \text{ }^{\circ}\text{C} \vee \geq +70 \text{ }^{\circ}\text{C}$ |
| Hysteresis                             | 3...15 %                                                                                   |
| Electrical data                        |                                                                                            |
| Operating voltage $U_B$                | 10...30 VDC                                                                                |
| Ripple $U_{ss}$                        | $\leq 10 \%$ $U_{Bmax}$                                                                    |
| DC rated operating current $I_o$       | $\leq 200$ mA                                                                              |
| No-load current                        | $\leq 25$ mA                                                                               |
| Residual current                       | $\leq 0.1$ mA                                                                              |
| Isolation test voltage                 | 0.5 kV                                                                                     |
| Short-circuit protection               | yes/Cyclic                                                                                 |
| Voltage drop at $I_o$                  | $\leq 1.8$ V                                                                               |
| Wire break/reverse polarity protection | yes/Complete                                                                               |
| Output function                        | 3-wire, NO contact, PNP                                                                    |
| DC field stability                     | 300 mT                                                                                     |
| AC field stability                     | 300 mT <sub>ss</sub>                                                                       |
| Insulation class                       | □                                                                                          |

## Features

- M30 × 1.5 threaded tube
- Chrome-plated brass
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Extended temperature range
- High switching frequency
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Cable connection

## Wiring diagram



## Functional principle


Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox Factor 1 sensors have significant advantages due to their patented ferrite-coreless multi-coil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.

## Technical data

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Switching frequency                   | 1 kHz                                     |
| <b>Mechanical data</b>                |                                           |
| Design                                | Threaded barrel, M30 x 1.5                |
| Dimensions                            | 64 mm                                     |
| Housing material                      | Metal, CuZn, Chrome-plated                |
| Active area material                  | Plastic, PBT                              |
| End cap                               | Plastic, EPTR                             |
| Max. tightening torque of housing nut | 75 Nm                                     |
| Electrical connection                 | Cable                                     |
| Cable quality                         | Ø 5.2 mm, LifYY, PVC, 2 m                 |
| Core cross-section                    | 3 x 0.34 mm <sup>2</sup>                  |
| <b>Environmental conditions</b>       |                                           |
| Ambient temperature                   | -30...+85 °C                              |
| Vibration resistance                  | 55 Hz (1 mm)                              |
| Shock resistance                      | 30 g (11 ms)                              |
| Protection class                      | IP68                                      |
| MTTF                                  | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                       | LED, Yellow                               |

## Mounting instructions

### Mounting instructions/Description

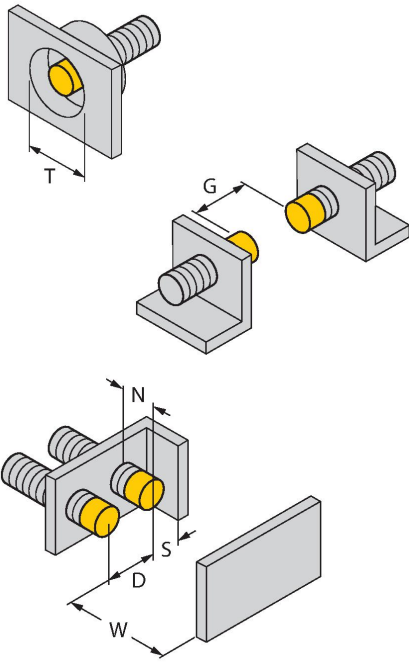


|                        |         |
|------------------------|---------|
| Distance D             | 3 x B   |
| Distance W             | 3 x Sn  |
| Distance T             | 3 x B   |
| Distance S             | 0.5 x B |
| Distance G             | 6 x Sn  |
| Distance N             | 2 x Sn  |
| Diameter active area B | Ø 30 mm |

## Accessories

### BST-30B

6947216


Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6



### QM-30

6945103


Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M36 x 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.



### MW30

6945005

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



### BSS-30

6901319

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

