



# EKWB001-A4.400-WE2Y-4/SV

## Actuator and Sensor Cable – Connection Cable

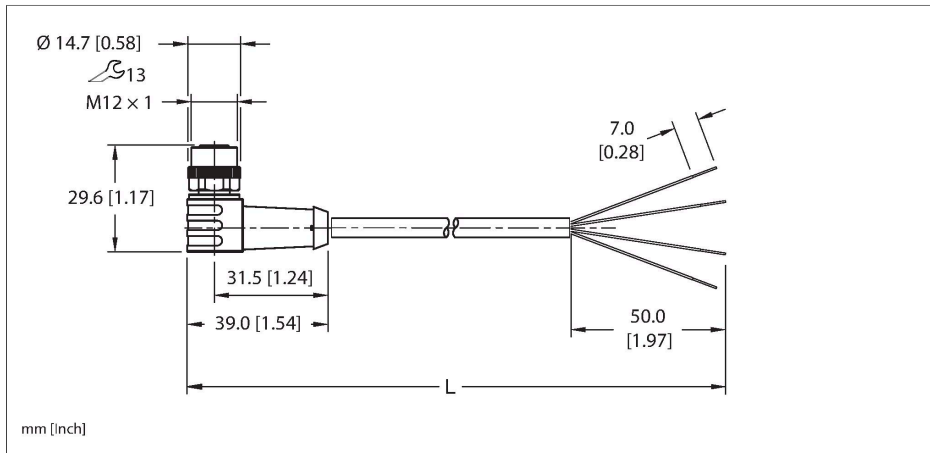


### Technische Daten

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Type                            | EKWB001-A4.400-WE2Y-4/SV                                  |
| ID                              | 200002311                                                 |
| Replaces                        | WK 4.4T-x/S1587                                           |
| Special version                 | SV = Packaged for vending machine                         |
| Connector A                     | Female, M12 x 1, Right angle, A-code                      |
| Design specification            | Acc. to IEC 61076-2-101                                   |
| Number of contacts              | 4                                                         |
| Contacts                        | Bronze, CuSn, Gold-plated                                 |
| Contact carriers                | Plastic, Nylon or TPU, Black                              |
| Connector body                  | Plastic, TPU, Yellow                                      |
| Coupling nut                    | Brass, CuZn, Nickel-plated                                |
| Connector seal                  | O-ring, Plastic, FKM/FPM                                  |
| Tightening torque (range)       | 0.4 ... 1.8 Nm<br>(note max. torque of mating connector!) |
| Mechanical life                 | > 100 Mating cycles                                       |
| Pollution degree                | 3                                                         |
| Protection class (When coupled) | IP67, IP68, IP69, IP69K<br>NEMA: 1, 3, 4, 6P, 12          |
| <b>Cable data</b>               |                                                           |
| Cable ID                        | RF51132                                                   |
| Total number of conductors      | 4                                                         |
| Cable diameter                  | Ø 5.33 mm                                                 |
| Length (L)                      | 4 m, (+50mm or 4% of length/-0.0, Whichever is greater)   |
| Cable jacket                    | TPE, Yellow                                               |

### Features

- UL US CE UK CA RoHS compliant IP67/IP68 IP69/IP69K DEGREE OF PROTECTION
- M12, Female, Right angle, 4-pin
- Instrumentation Tray Cable
- Yellow TPE jacket, 4X22 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- Flexlife® and C-Track Approved

### Cable cross section

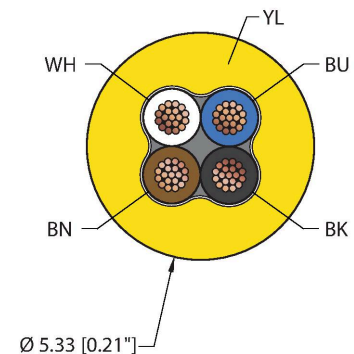


### Contact assignment

Technische Daten

|                                                                                                                                                                                                    |                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Conductor diameter                                                                                                                                                                                 | 0.054 "                                                                                    |
| Conductor material                                                                                                                                                                                 | TC (tinned copper)                                                                         |
| Conductor insulation material                                                                                                                                                                      | PVC                                                                                        |
| Conductor size                                                                                                                                                                                     | 4 x 22 AWG [Similar to 0.34 mm²]                                                           |
| Number of strands x O.D.                                                                                                                                                                           | 19 x 0.0058 "                                                                              |
| Conductor colors                                                                                                                                                                                   | BN, WH, BU, BK                                                                             |
| Electrical properties at +20 °C                                                                                                                                                                    |                                                                                            |
| Rated voltage                                                                                                                                                                                      | 250 V <sub>AC</sub> /300 V <sub>DC</sub>                                                   |
| Current                                                                                                                                                                                            | 4 A                                                                                        |
| Mechanical and chemical properties                                                                                                                                                                 |                                                                                            |
| Bending radius (static)                                                                                                                                                                            | ≥ 5 x Ø                                                                                    |
| Bending radius (dynamic)                                                                                                                                                                           | ≥ 10 x Ø                                                                                   |
| UL cold bend rating                                                                                                                                                                                | -40 °C                                                                                     |
| Flex rating 20 x Ø                                                                                                                                                                                 | 10 million cycles                                                                          |
|                                                                                                                                                                                                    | *When properly installed @ 20°C,<br>50%RH, and a cycle speed of ≤0.5 cycles<br>per second. |
| C-Track                                                                                                                                                                                            | Yes                                                                                        |
| Ambient temperature range (static)                                                                                                                                                                 | -40...+105 °C                                                                              |
| Ambient temperature range (dynamic)                                                                                                                                                                | 5...+105 °C                                                                                |
| Temperature range (installation)                                                                                                                                                                   | -10...+105 °C                                                                              |
| Approval                                                                                                                                                                                           |                                                                                            |
| Approvals                                                                                                                                                                                          | UL 2238<br>CSA C22.2 No. 182.3<br>CE<br>UKCA<br>RoHS                                       |
| Note                                                                                                                                                                                               |                                                                                            |
| - Flex ratings may be reduced if used in<br>extreme temperatures, exposure to cer-<br>tain chemicals, operating above the rated<br>cycle speed, or operating below the rated<br>cable bend radius. |                                                                                            |
| - We reserve the right to make technical<br>alterations without prior notice.                                                                                                                      |                                                                                            |

Connector A



Circuit Diagram

|   |    |
|---|----|
| 1 | BN |
| 2 | WH |
| 3 | BU |
| 4 | BK |


Montagezubehör

M12-TORQUE-SLEEVE,YELLOW(10PACK) A900167



10 Pack of Yellow Torque Sleeves for the new M12 cordsets. Compatible with male, female, straight and right-angled, stainless steel and nickel-plated brass coupling nuts.


TORQUE-WRENCH-SET-M12/SW13 A900152



Adjustable torque driver to connect to the 13mm hex. Compatible with redesigned M12 cordsets, M12 Power, and M12 X-code. NOT Compatible with legacy M12 cordsets. Includes (1) adjustable torque driver, (1) adjustment tool, and (1) 13mm forked bit.

Montagezubehör

M12-CORDSETS-MOUNTING-CLIP-(10/BAG) 100016882



10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.