


EFKVQ-B5.5GD.2-1

Actuator and Sensor Receptacle – Front Mount




Features

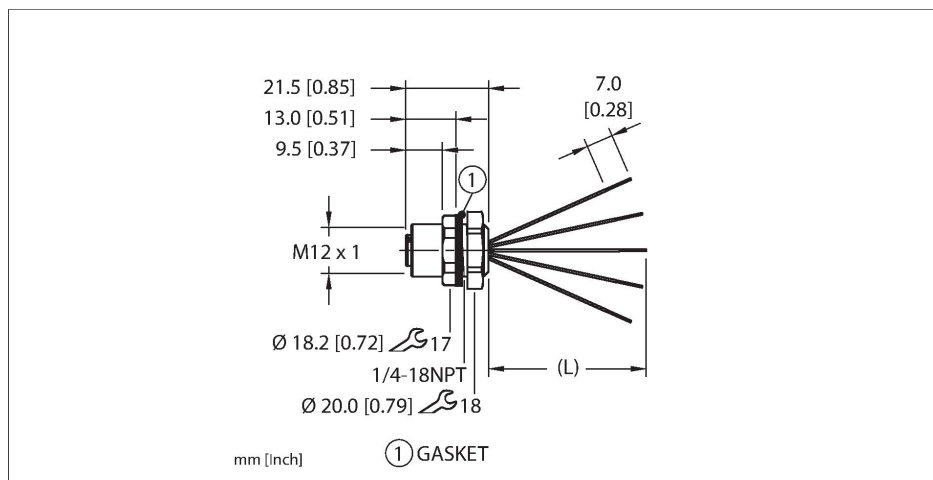


- M12, Female, Receptacle, Front mount, 5-pin
- Mounting thread: 1/4"-18 NPT

Contact assignment


Connector A



Circuit Diagram



Mounting hole - Through




Technische Daten

Type	EFKVQ-B5.5GD.2-1
ID	200003502
Replaces	FKV 4.5-x/1/4-18 NPT/S717/S1337
Connector A	Female, M12 × 1, B-code
Design specification	Acc. to IEC 61076-2-101
Number of contacts	5
Contacts	Bronze, CuSn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector seal	O-ring, Plastic, FKM/FPM
Housing material/finish	Stainless Steel, 1.4401 (AISI 316), Passivated
Tightening torque (range)	0.4 ... 1.8 Nm (note max. torque of mating connector!)
Mounting orientation	Front mount
Panel seal	Gasket, NBR
Mounting thread	1/4"-18 NPT
Locknut	Stainless Steel, 1.4401 (AISI 316), Passivated
Receptacle mounting torque	3.5...6.2 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K NEMA: 1, 3, 4, 4X, 6P, 12
Conductor data	
Total number of conductors	5


Technische Daten

Length (L)	0.1 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	22 AWG [Similar to 0.34 mm²]
Conductor colors	BN, WH, BU, BK, GNYE
Electrical properties at +20 °C	
Rated voltage	250 V _{AC} /300 V _{DC}
Current	4 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+105 °C
Approvals	UL 2238 CSA C22.2 No. 182.3 CE UKCA RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	

Mounting hole - Threaded

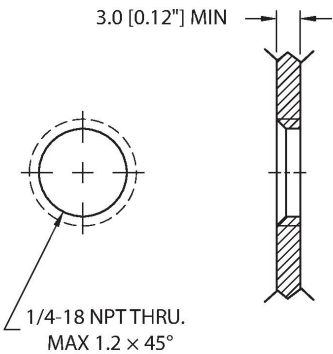

Front panel mounting

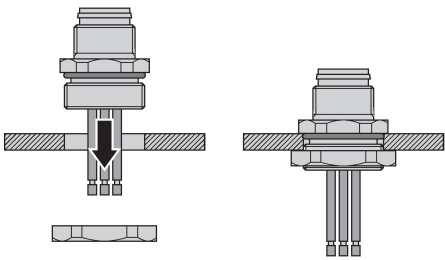

Montagezubehör

M12-GASKET-PG9,M16,1/4NPT-(10/BAG)

Ø 13.2 [0.52"]
Ø 18.5 [0.73"]
1.6 [0.06"]

100015009
Gasket, Black NBR, Fits PG9, M16 and 1/4NPT mounting threads, 10 per bag

LOCKNUT-1/4NPT-316SS-(10/BAG)

1/4-18NPTSL
SW 18
Ø 20.0 [0.79"]
4.0 [0.16"]

100024934
Locknut, 1/4NPT, 316 Stainless Steel, 10 per bag

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1)

52.1 [2.05"]
38.0 [1.50"]
4.0 [0.16"]
Ø 20.0 [Ø0.79"]
Ø 27.0 [Ø1.06"]
Ø 34.0 [Ø1.34"]

100008955
1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.