


RSMS RKFPV 126-1.8M

Actuator and Sensor Cable – Extension Cable

Rear Mount

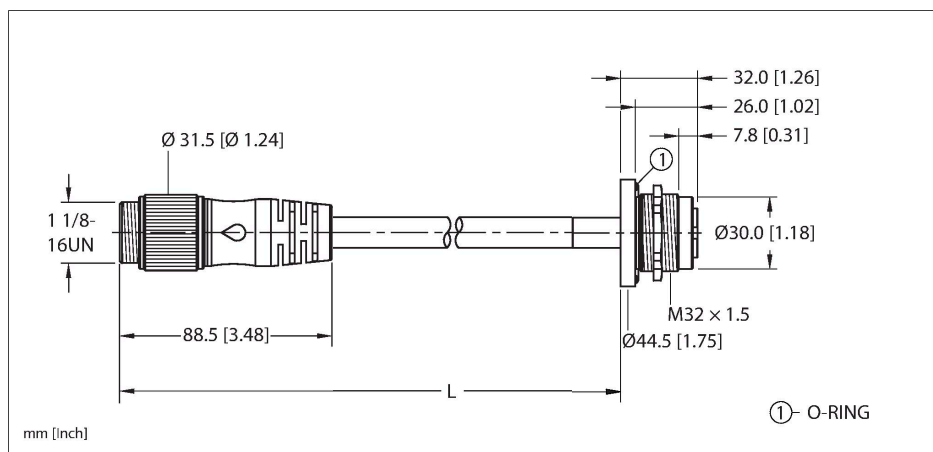


Features

- UL US CE UK CA RoHS compliant IP67/IP68 IP69/IP69K DEGREE OF PROTECTION
- 1-1/8" Male, Straight, 12-pin
- Shield to coupling nut
- 1-1/8, Female, Receptacle, Rear mount, 12-pin
- Instrumentation Tray Cable
- Yellow PVC jacket, shielded, 12X16 AWG
- Sunlight Resistant
- 40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4


Technische Daten

Type	RSMS RKFPV 126-1.8M
ID	200009758
Connector A	Male, 1 1/8"-16 UN, Straight
Number of contacts	12
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Tightening torque	3 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12
Connector B	Female, 1 1/8"-16 UN
Number of contacts	12
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Housing material/finish	Stainless Steel, 1.4401 (AISI 316), Passivated
Tightening torque	3 Nm
Mounting type	Rear mount
Panel seal	O-ring, Plastic, NBR
Mounting Thread B	M32 x 1.5

Cable cross section

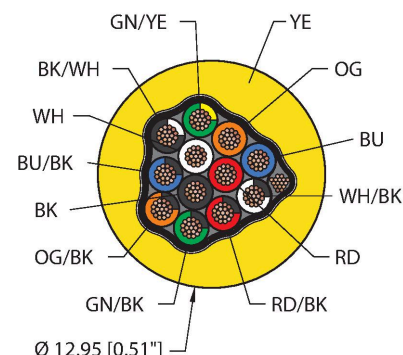


Contact assignment

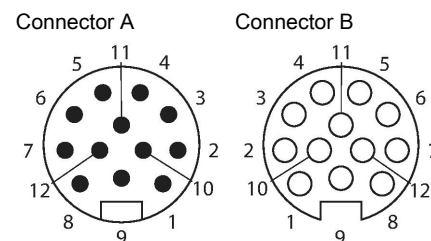


Technische Daten

Locknut	Stainless Steel, 1.4401 (AISI 316), Passivated
Receptacle mounting torque	13.6...27 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
	NEMA: 1, 3, 4, 4X, 6P, 12
Cable data	
Total number of conductors	12
Cable diameter	Ø 12.95 mm
Length (L)	1.8 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Cable jacket	PVC, Yellow
Shielding	Aluminum/polyester (OUT), 36 AWG, TC (Tinned Copper), 65% coverage, 18 AWG, TC (Tinned Copper)
Conductor diameter	0.088 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	12 x 16 AWG [Similar to 1.50 mm²]
Number of strands x O.D.	19 x 0.0117 "
Conductor colors	OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, BU/BK, BK/WH, GN/YE, RD, WH, BK
Electrical properties at +20 °C	
Rated voltage	600 V
Current	7 A
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+105 °C
Ambient temperature range (dynamic)	5...+105 °C
Temperature range (installation)	-10...+105 °C
Approval	
Approvals	CE RoHS UL Listed UL 2238

Circuit Diagram

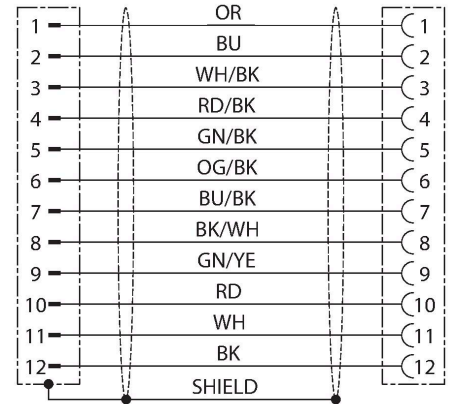


Mounting hole - Through



mm [Inch]

Lock nut detail

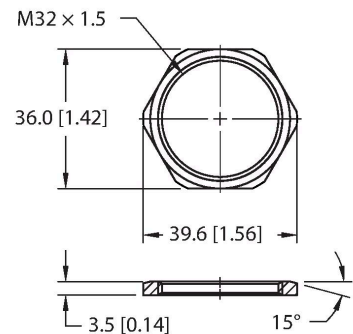

mm [Inch]

Technische Daten

Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

Rear-mounted

