


Compact power supply module in IP67 24 VDC output voltage - 2 A output current PSU67-11-2420/MV

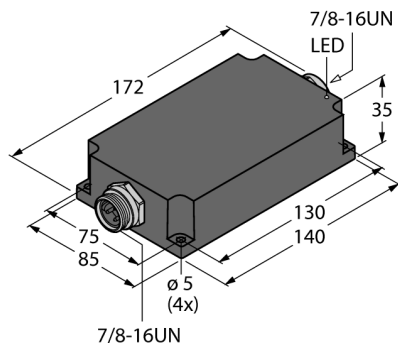

Type	PSU67-11-2420/MV
ID	200014189

Nominal voltage	Universal voltage supply unit
Operating voltage	100...240 VAC
Frequency	50...60 Hz
Operating voltage U_o	100...300 VDC
External fuse	B10A, C10A
Mains buffering	Ui: 100...240 VAC/ 50 ms

Nominal output voltage	24 V
Nominal current	2 A

Overload protection	105...130 %
Parallel mode	no
Ripple	240 mV
Short-circuit behaviour	Current limiting


Approval	CE-compliant RoHS compliant Safety extra low voltage SELV acc. to EN 60950-1: 2016 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013 (Information technology equipment - safety) EN 61000-6-2: 2005 (Immunity) EN 61000-6-3: 2007 + A1: 2011 (Emission) EN 61000-3-2: 2006 + A1: 2009 + A2: 2009 (Harmonics)
----------	---

Operational readiness	Green
-----------------------	-------

Protection class	IP67
Ambient temperature	-25...+60 °C
Storage temperature	-40...+85 °C
Derating	2 %/K from 50 °C
Dimensions	85 x 172 x 35 mm
Housing material	Glass fiber-reinforced polyamide, PA66-GF25
Electrical connection	7/8" stainless steel connector
MTTF	87 years acc. to SN 29500 (Ed. 99) 40 °C

- Broad temperature range
- Status LED

7/8" Input Assignment



7/8" Output Assignment

