


BI2-EGT08K-AP6X-0.3-RS4T/S1764



Inductive Sensor – With Extended Switching Distance

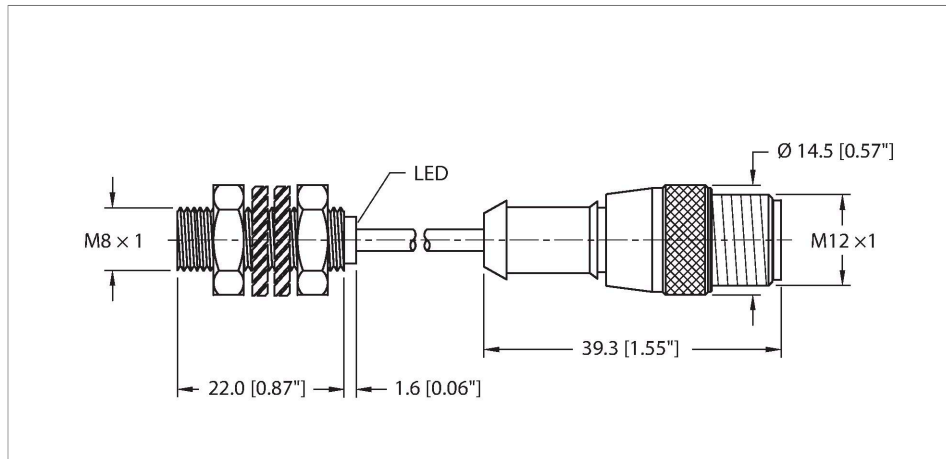

Features

- M8 × 1 threaded barrel
- Stainless steel, PTFE-coated
- Temperatures up to +100 °C
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Pigtail with male end M12 x 1

Wiring diagram

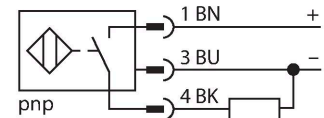


Technical data

Type	BI2-EGT08K-AP6X-0.3-RS4T/S1764
ID	4602596
General data	
Rated switching distance	2 mm
Mounting conditions	Flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeat accuracy	$\leq 2 \%$ of full scale
	$\leq \pm 20 \%, \geq +70 \text{ }^{\circ}\text{C}$
Hysteresis	3...15 %
Electrical data	
Operating voltage U_B	10...30 VDC
Ripple U_{rs}	$\leq 10 \%$ U_{Bmax}
DC rated operating current I_o	$\leq 150 \text{ mA}$
Rated operational current	See derating curve
No-load current	$\leq 15 \text{ mA}$
Residual current	$\leq 0.1 \text{ mA}$
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I_o	$\leq 1.8 \text{ V}$
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
Switching frequency	1 kHz

Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. The sensors hosting a ferrite core coil generate the AC field through an LC resonant circuit. Special versions are available for ambient temperatures between -60°C and +250°C.

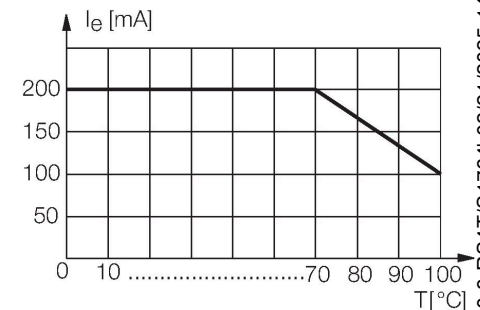

Technical data


Mechanical data	
Design	Threaded barrel, M8 x 1
Dimensions	23.6 mm
Housing material	Stainless steel, 1.4427 SO, PTFE-coated
Active area material	Plastic, PA12-GF20, PTFE-coated
End cap	Plastic, PP
Max. tightening torque of housing nut	5 Nm
Electrical connection	Cable with connector, M12 × 1
Cable quality	Ø 3 mm, Gray, Lif12Y33Y, TPE, 0.3 m
	halogen-free
Core cross-section	3 x 0.14 mm ²
Environmental conditions	
Ambient temperature	-25...+100 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions


Mounting instructions/Description	
	Distance D $3 \times B$
	Distance W $3 \times S_n$
	Distance T $3 \times B$
	Distance S $1.5 \times B$
	Distance G $6 \times S_n$
	Diameter active area B $\varnothing 8 \text{ mm}$

Accessories

MW08	6945008
Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)	

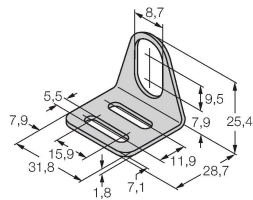

MBS80	69479
Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum	



BSS-08	6901322
Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene	

