


# NI3-M08K-AP6X


## Inductive Sensor – With Increased Switching Distance



### Features

- Threaded barrel, M8 x 1
- Nickel-plated brass
- Large sensing range
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Cable connection

### Wiring diagram



### Technical data

|                                        |                                                     |
|----------------------------------------|-----------------------------------------------------|
| Type                                   | NI3-M08K-AP6X                                       |
| ID                                     | 4602851                                             |
| General data                           |                                                     |
| Rated switching distance               | 3 mm                                                |
| Mounting conditions                    | Non-flush                                           |
| Secured operating distance             | $\leq (0.81 \times S_n)$ mm                         |
| Correction factors                     | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                        | $\leq 2$ % of full scale                            |
| Temperature drift                      | $\leq \pm 10$ %                                     |
| Hysteresis                             | 3...15 %                                            |
| Electrical data                        |                                                     |
| Operating voltage $U_b$                | 10...30 VDC                                         |
| Ripple $U_{rs}$                        | $\leq 10$ % $U_{bmax}$                              |
| DC rated operating current $I_o$       | $\leq 150$ mA                                       |
| No-load current                        | $\leq 15$ mA                                        |
| Residual current                       | $\leq 0.1$ mA                                       |
| Isolation test voltage                 | 0.5 kV                                              |
| Short-circuit protection               | yes/Cyclic                                          |
| Voltage drop at $I_o$                  | $\leq 1.8$ V                                        |
| Wire break/reverse polarity protection | yes/Complete                                        |
| Output function                        | 3-wire, NO contact, PNP                             |
| Switching frequency                    | 2.8 kHz                                             |

### Functional principle



Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

## Technical data

| Mechanical data                       |                                                                     |
|---------------------------------------|---------------------------------------------------------------------|
| Design                                | Threaded barrel, M8 x 1                                             |
| Dimensions                            | 24.1 mm                                                             |
| Housing material                      | Metal, CuZn, Nickel Plated                                          |
| Active area material                  | Plastic, PP-GF20                                                    |
| End cap                               | Plastic, PP-GF20                                                    |
| Max. tightening torque of housing nut | 7 Nm                                                                |
| Electrical connection                 | Cable                                                               |
| Cable quality                         | Ø 3 mm, Gray, Lif9Y-11Y, PUR, 2 m                                   |
|                                       | Suited for E-ChainSystems® acc. to manufacturers declaration H1063M |
| Core cross-section                    | 3 x 0.14 mm <sup>2</sup>                                            |
| Environmental conditions              |                                                                     |
| Ambient temperature                   | -25...+70 °C                                                        |
| Vibration resistance                  | 55 Hz (1 mm)                                                        |
| Shock resistance                      | 30 g (11 ms)                                                        |
| Protection class                      | IP67                                                                |
| MTTF                                  | 2283 years acc. to SN 29500 (Ed. 99) 40 °C                          |
| Switching state                       | LED, Yellow                                                         |

## Mounting instructions

### Mounting instructions/Description

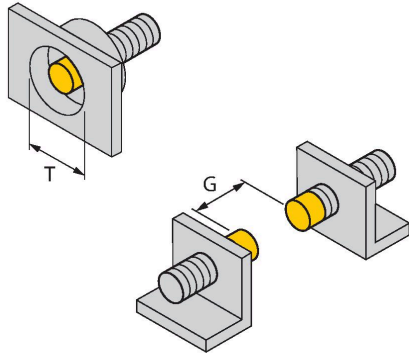


|                        |                |
|------------------------|----------------|
| Distance D             | $3 \times B$   |
| Distance W             | $3 \times S_n$ |
| Distance T             | $3 \times B$   |
| Distance S             | $1.5 \times B$ |
| Distance G             | $6 \times S_n$ |
| Distance N             | $2 \times S_n$ |
| Diameter active area B | Ø 8 mm         |

## Accessories

## MW08

6945008


Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



## BSS-08

6901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



## MBS80

69479

Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum

