


# BIM-PST-AN6X W/KLP80 4M


## Magnetic Field Sensor – For Pneumatic Cylinders

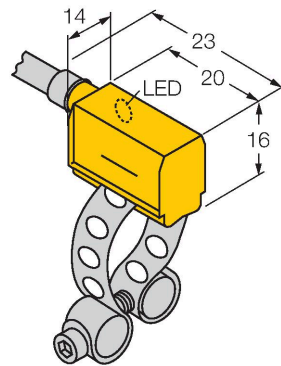

### Features

- Rectangular, height 16 mm
- Active face in front
- Plastic, PA12-GF30
- Magnetic-inductive sensor
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

### Wiring diagram



### Functional principle

Magnetic field sensors are activated by magnetic fields and are especially suited for piston position detection in pneumatic cylinders. Based on the fact that magnetic fields can permeate non-magnetizable metals, it is possible to detect a permanent magnet attached to the piston through the aluminium wall of the cylinder.

### Technical data


|                                        |                           |
|----------------------------------------|---------------------------|
| Type                                   | BIM-PST-AN6X W/KLP80 4M   |
| ID                                     | 4624101                   |
| General data                           |                           |
| Pass speed                             | $\leq 10 \text{ m/s}$     |
| Repeatability                          | $\leq \pm 0.1 \text{ mm}$ |
| Temperature drift                      | $\leq 0.1 \text{ mm}$     |
| Hysteresis                             | $\leq 1 \text{ mm}$       |
| Electrical data                        |                           |
| Operating voltage $U_s$                | 10...30 VDC               |
| Ripple $U_{ss}$                        | $\leq 10 \% U_{Bmax}$     |
| DC rated operating current $I_o$       | $\leq 200 \text{ mA}$     |
| No-load current                        | $\leq 15 \text{ mA}$      |
| Residual current                       | $\leq 0.1 \text{ mA}$     |
| Isolation test voltage                 | 0.5 kV                    |
| Short-circuit protection               | yes/Cyclic                |
| Voltage drop at $I_o$                  | $\leq 1.8 \text{ V}$      |
| Wire break/reverse polarity protection | yes/Complete              |
| Output function                        | 3-wire, NO contact, NPN   |
| Switching frequency                    | 1 kHz                     |
| Mechanical data                        |                           |
| Design                                 | Rectangular, PST          |
| Dimensions                             | 23 x 14 x 16 mm           |
| Housing material                       | Plastic, PA12-GF30        |
| Active area material                   | Plastic, PA12-GF30        |

Technical data

|                                    |                                            |
|------------------------------------|--------------------------------------------|
| Electrical connection              | Cable                                      |
| Cable quality                      | Ø 4 mm, Gray, LifYY, PVC, 4 m              |
| Core cross-section                 | 3 x 0.25 mm <sup>2</sup>                   |
| Environmental conditions           |                                            |
| Ambient temperature                | -25...+70 °C                               |
| Vibration resistance               | 55 Hz (1 mm)                               |
| Shock resistance                   | 30 g (11 ms)                               |
| Protection class                   | IP67                                       |
| MTTF                               | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Mounting on the following profiles |                                            |
| Cylindrical design                 | ○                                          |
| Switching state                    | LED, Yellow                                |
| Included in delivery               | KLP80                                      |


Accessories

KLP 25 MONTAGESET69653

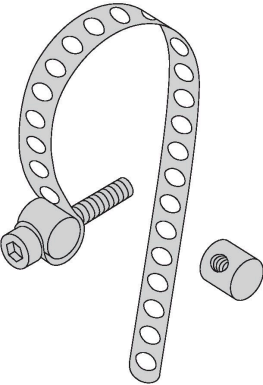


Mounting on round cylinders; cylinder diameter 8...25 mm; material: Metal CuZn; two tie bolts (material: Metal CuZn), cylinder screw M3 x 20

KLP 80-VA69654

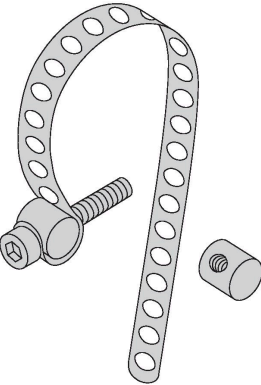

Mounting on round cylinders; cylinder diameter 25...80 mm; material: Metal A2 1.4301 (AISI 304); two tie bolts (material: Metal CuZn, alternatively metal A2 1.4301 / AISI 304) cylinder screw M3 x 20; (DIN 912-A20)

KLP 200-VA6965302

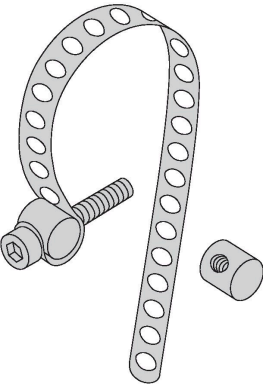

Mounting on round cylinders; cylinder diameter 80...200 mm material: Metal A2 1.4301 (AISI 304); two tie bolts (material: Metal CuZn, alternatively metal A2 1.4301 / AISI 304) cylinder screw M3 x 20; (DIN 912-A20)