BIM-AKT-AP6X/S235
Magnetic Field Sensor – Magnetic-inductive Proximity Sensor



Features

- Rectangular, height 15mm
- Concentric active face
- Plastic, PA12-GF30
- Increased sensitivity
- DC 3-wire, 10…30 VDC
- NO contact, PNP output
- Cable connection

Wiring diagram



Technical data

Type	BIM-AKT-AP6X/S235
Ident. no.	4675021
Special version	S235 corresponds to: Special calibration (increased sensitivity)
Pass speed	≤ 10 m/s
Repeatability	≤ ± 0.1 mm
Temperature drift	≤ 0.1 mm
Hysteresis	≤ 1 mm
Ambient temperature	-25…+70 °C
Operating voltage	10…30 VDC
Residual ripple	≤ 10 % U_{ss}
DC rated operational current	≤ 200 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I_e	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, PNP
Switching frequency	1 kHz
Design	Rectangular, AKT
Dimensions	28 x 30 x 15 mm
Housing material	Plastic, PA12-GF30
Active area material	Plastic, PA12-GF30

Functional principle

Magnetic field sensors are activated by magnetic fields and are especially suited for piston position detection in pneumatic cylinders. Based on the fact that magnetic fields can permeate non-magnetizable metals, it is possible to detect a permanent magnet attached to the piston through the aluminium wall of the cylinder.

BIM-AKT-AP6X/S235| 09/09/2020 16-33 | technical changes reserved

Technical data

Electrical connection	Cable
Cable quality	Ø 4 mm, Gray, LifYY, PVC, 2 m
Core cross-section	3 x 0.25 mm²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Mounting on the following profiles	
Cylindrical design	#
Switching state	LED, Red

Accessories

KLA1 69700

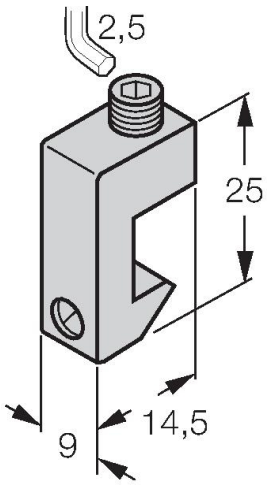

Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter 32… 50 mm, material: Anodized aluminum

KLA3 69702

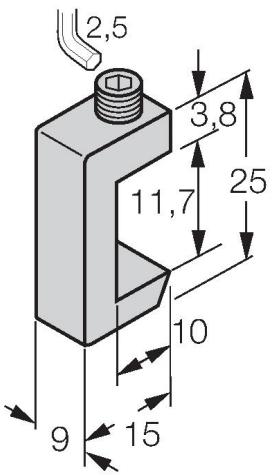

Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter 32… 63 mm; material: Stainless steel

KLA2 69701



Mounting bracket for mounting magnetic field sensors on tie-rod cylinders; cylinder diameter 40… 125 mm; material: Aluminum

BIM-AKT-AP6X/S235| 09/09/2020 16-33 | technical changes reserved