



Bus termination resistor RSMV-48TR-EX



- Type: 7/8" male connector
- Stainless steel coupling nut, straight, 4-pin
- For use in PROFIBUS-PA applications
- Temperature range: -40 °C...+70 °C
- Protection class: IP67
- FISCO compliant according to IEC TS 60079-27

Wiring Diagram

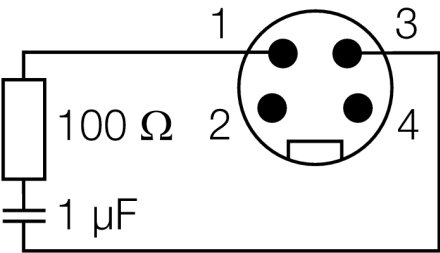

Type	RSMV-48TR-EX
ID	6602370
Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	4
Contact carriers	Plastic, PUR, Black
Connector body	Plastic, PUR, Blue
Protection class (When coupled)	IP67, (screwed together)
Fieldbus	PROFIBUS-PA
Mechanical and chemical properties	
Ambient temperature range (dynamic)	-40°C...+70°C