



Bus termination resistor

RSEV-48TR-EX



- Type: M12 male connector
- Stainless steel coupling nut, straight, 4-pin
- For use in PROFIBUS-PA applications
- Temperature range: -40 °C...+70 °C
- Protection class: NEMA 1, 3, 4, 6P and IEC IP67
- FISCO compliant according to IEC TS 60079-27

Wiring Diagram

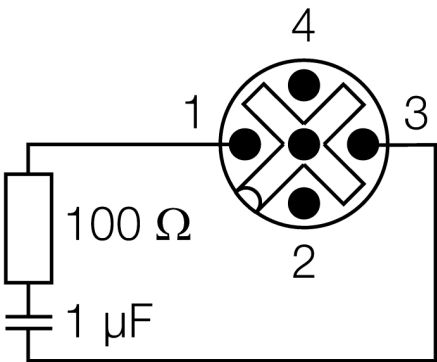

Type	RSEV-48TR-EX
ID	6602560
Connector A	Male, M12 × 1, Straight
Number of contacts	4
Contact carriers	Plastic, PUR, Black
Connector body	Plastic, PUR, Blue
Protection class (When coupled)	IP67, (screwed together)
Fieldbus	PROFIBUS-PA
Mechanical and chemical properties	
Ambient temperature range (dynamic)	-40°C...+70°C