


BL compact™ fieldbus station for DeviceNet™

4 Analog Inputs for Current or Voltage and 8 Configurable Digital PNP Channels

BLCDN-8M12LT-4AI-VI-8XSG-PD

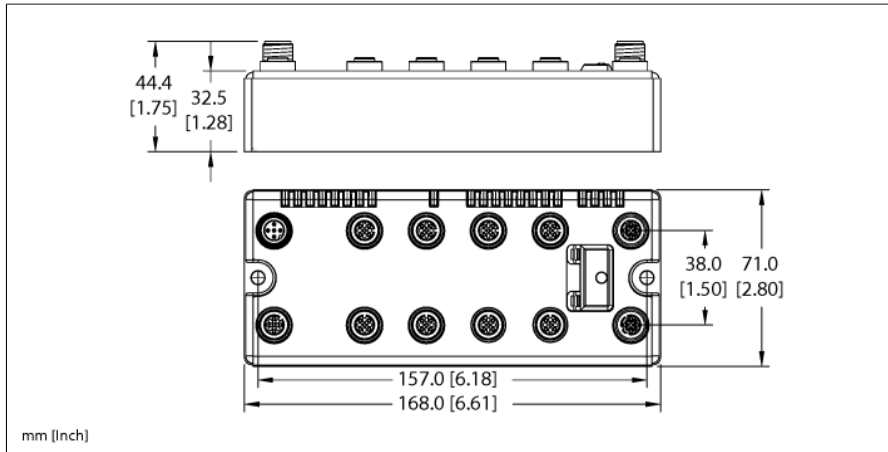


ID	6811047
Nominal system voltage	24 VDC
System power supply	Via fieldbus and auxiliary power
Voltage supply connection	2 x M12, 4-pin
Admissible range V+	11...30 VDC
Nominal current V+	30 mA
Max. current V+	4 A
Admissible range Vi	18...30 VDC
Nominal current Vi	112 mA
Max. current Vi	2 A
Admissible range Vo	18...30 VDC
Nominal current Vo	100 mA
Max. current Vo	4 A
Electrical isolation	The 8XSG I/O cards have a common reference potential for operating and load voltage due to their freely selectable digital channels. Subsequently, all voltage sources (VI / VO / V+) present on this device must be concurrently connected to suitable power supplies.
Fieldbus transmission rate	125/250/500 kbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...63 64...80 (MacID programmable) 81...99 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12 5-pole
Fieldbus termination	external
Service interface	RS232 interface
Vendor ID	48
Product type	12
Product code	11047



- On-machine Compact fieldbus I/O block
- DeviceNet™ slave
- 125 / 250 / 500 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 Configurable digital PNP channels, 24 VDC
- Max. 0.5A per channel
- Channel diagnostics
- Selection of filtering times (Input delay)
- Invertible inputs
- 4 analog inputs for current or voltage
- 0/4...20 mA or -10/0...+10 VDC (selectable per channel)

Digital inputs	From 8XSG
Input type	PNP
Type of input diagnostics	Channel diagnostics
Sensor supply (V _{SENS})	24 VDC, 100 mA short-circuit limiting
Low-level signal voltage	4.5 V
Low-level signal voltage	< 4.5 VDC
High-level signal voltage	7...30 VDC
Low-level signal current	< 1.5 mA
High-level signal current	2.1...3.7 mA
Input delay	0.25 or 2.5 ms (configurable)
Digital outputs	From 8XSG
Output type	PNP
Type of output diagnostics	Channel diagnostics
Sensor supply (V _{SENS})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes
Analog inputs	from 4AI-VI
Operating modes	0/4 ... 20 mA or -10/0 ... 10 VDC
Type of input diagnostics	Channel diagnostics
Sensor supply	24 VDC, 1 amp max.
Input resistance	Current: < 0.125 KΩ, Voltage: < 98.5 KΩ
Maximum limiting frequency analog	< 20 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeatability	< 0.05 %
Temperature coefficient	< 300 ppm / °C of full scale
Resolution	16 Bit
Measuring principle	Sigma Delta
Measurement display	16 bit signed integer
	12 bit full range left-justified
Dimensions	168 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	620 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67
	IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus


Pinning and wiring diagram

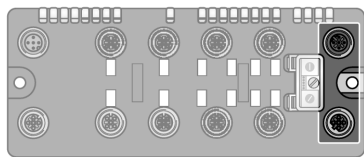


DeviceNet
Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or
RSC-RKC572-2M ident-no. 6603629

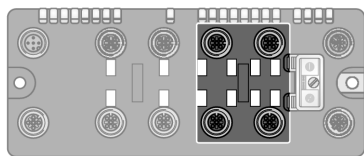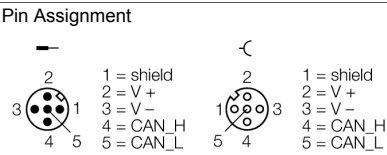

Slot 1: Analog Inputs
Extension cable (example): RK 4.5T-2-RS 4.5T/S653 ident-no.
U2187-09 or RKC4.5T-2-RSC4.5T/TEL ident-no. 6625212


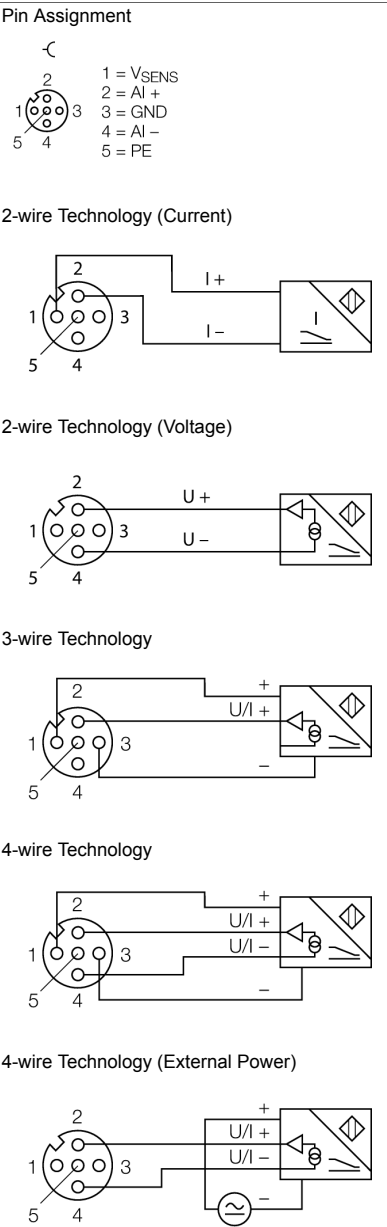


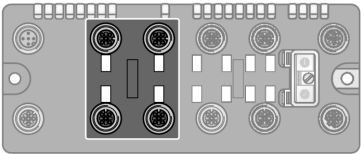

Slot 2: Digital Inputs and Outputs

Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment

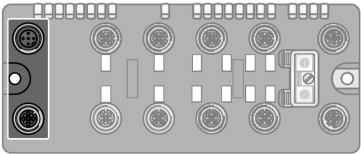

Auxiliary Power

Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment



I/O & Diagnostic Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AI 1 ₀	0	AI 1 ₀ LSB							
	1	AI 1 ₀ MSB							
AI 1 ₁	2	AI 1 ₁ LSB							
	3	AI 1 ₁ MSB							
AI 1 ₂	4	AI 1 ₂ LSB							
	5	AI 1 ₂ MSB							
AI 1 ₃	6	AI 1 ₃ LSB							
	7	AI 1 ₃ MSB							
	8	DI 2 ₇	DI 2 ₆	DI 2 ₅	DI 2 ₄	DI 2 ₃	DI 2 ₂	DI 2 ₁	DI 2 ₀
	9	-	-	-	-	-	-	-	-
Diagnostics	10	Module number reporting diagnostic data							
	11	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot 1* (ref. Byte 10)	12	-	-	-	-	-	-	Open Circuit AI 1 ₀	Range Error AI 1 ₀
	13	-	-	-	-	-	-	Open Circuit AI 1 ₁	Range Error AI 1 ₁
	14	-	-	-	-	-	-	Open Circuit AI 1 ₂	Range Error AI 1 ₂
	15	-	-	-	-	-	-	Open Circuit AI 1 ₃	Range Error AI 1 ₃
Slot 2* (ref. Byte 10)	12	-	-	-	-	Over Current DI 2 ₃ / DI 2 ₇	Over Current DI 2 ₂ / DI 2 ₆	Over Current DI 2 ₁ / DI 2 ₅	Over Current DI 2 ₀ / DI 2 ₄
	13	Over Current DO 2 ₇	Over Current DO 2 ₆	Over Current DO 2 ₅	Over Current DO 2 ₄	Over Current DO 2 ₃	Over Current DO 2 ₂	Over Current DO 2 ₁	Over Current DO 2 ₀
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀
	1	-	-	-	-	-	-	-	-

* The scheduled diagnostic information changes every 125 ms between Slot 1 and Slot 2, if both slots send active diagnostics.