


BL compact™ fieldbus station for PROFIBUS-DP

8 Digital PNP Inputs and 8 Digital PNP Outputs

BLCDP-8M12LT-8DI-P-8DO-0.5A-P

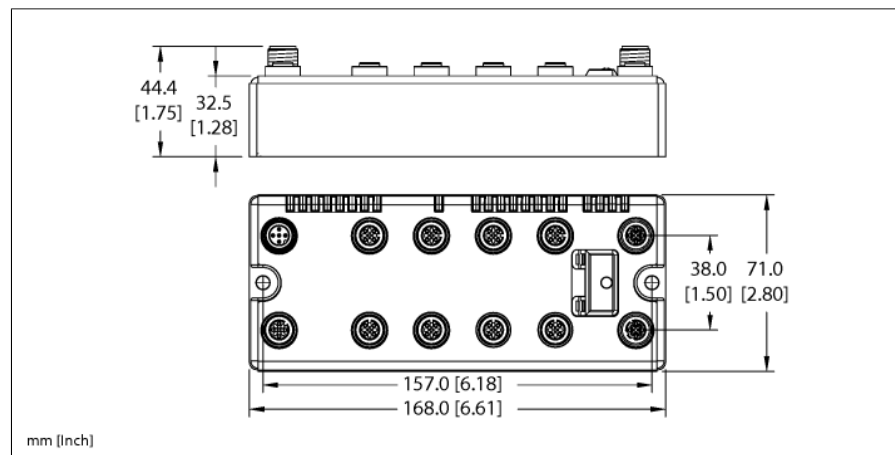


ID	6811194
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	18...30 VDC
Nominal current Vi	140 mA
Max. current Vi	2 A
Admissible range Vo	18...30 VDC
Nominal current Vo	100 mA
Max. current Vo	4 A
Fieldbus transmission rate	9.6 kbps ... 12 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole, reverse keyed
Fieldbus termination	external
Service interface	RS232 interface
Digital inputs	
Input type	PNP
Type of input diagnostics	Group diagnostics
Sensor supply (V _{SENS})	24 VDC
Low-level signal voltage	< 4.5 VDC
High level signal voltage	7 ... 30 VDC
Low level signal current	< 1.5 mA
High level signal current	2.1 ... 3.7 mA
Input delay	0.25 ms

- On-machine Compact fieldbus I/O block
- PROFIBUS-DP slave
- 9.6 kbps ... 12 Mbps
- Two 5-pole M12, reverse-keyed, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 digital PNP inputs, 24 VDC
- 8 digital PNP outputs, 24 VDC
- Max. 0.5A per output


Digital outputs	
Output type	PNP
Type of output diagnostics	Channel diagnostics
Sensor supply (V _{SENS})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes
Dimensions	168 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	620 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus

Pinning and wiring diagram

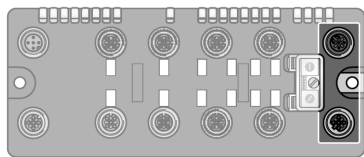


PROFIBUS-DP
Fieldbus cable (example): RSSW RKSW 455-2M ident-no. U0350
or RSSW-RKSW455-2M ident-no. 6602222

Pin Assignment (M12, B-Code)

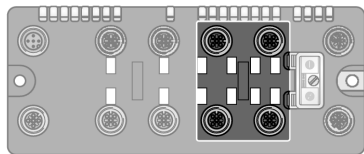


Slot 1: Digital Inputs
Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or
RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208



Pin Assignment



Wiring Diagram for Dual Input Sensor




Wiring Diagram for 2 Sensors

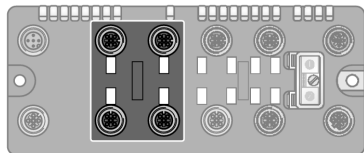



Slot 2: Digital Outputs
Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or
RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment




Wiring Diagram

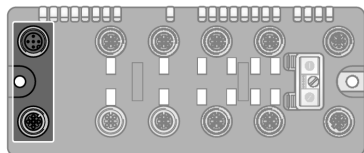

Auxiliary Power
Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no.
U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment



Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address

I/O LED status slot 1

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
DI Channels		OFF	Status of channel x = „0“ (OFF)
1 ₀ ...1 ₇	GREEN	ON	Status of channel x = „1“ (ON)

* D1 LED also indicates gateway diagnostics

I/O LED status slot 2

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)

* D2 LED also indicates gateway diagnostics

I/O Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
	1	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀
	1	-	-	-	-	-	-	-	-