


BL compact™ multiprotocol fieldbus station for Industrial Ethernet

Interface for Connection of 2 BL ident Read/Write Heads (HF/UHF) and 8 Digital NPN Outputs

BLCEN-6M12LT-2RFID-S-8DO-0.5A-N

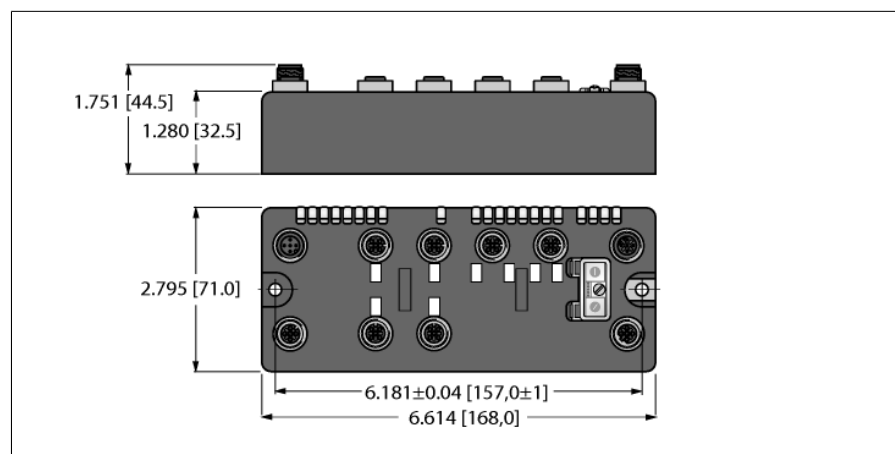

Type	BLCEN-6M12LT-2RFID-S-8DO-0.5A-N
ID	6811508
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	18...30 VDC
Nominal current Vi	150 mA
Max. current Vi	2 A
Admissible range Vo	18...30 VDC
Nominal current Vo	100 mA
Max. current Vo	4 A
Fieldbus transmission rate	10/100 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...92 0 (192.168.1.254) 93 (BOOTP) 94 (DHCP) 95 (PGM) 96 (PGM-DHCP) *recommended for PROFINET 97...98 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12 4-pole, D-coded
Protocol detection	automatic
Web server	Integrated
Service interface	Ethernet
Vendor ID	48
Product type	12
Product code	11508

- On-machine Compact fieldbus I/O block
- EtherNet/IP™, Modbus® TCP, or PROFINET slave
- Integrated Ethernet Switch
- 10 Mbps / 100 Mbps supported
- Two 4-pole M12, D-coded, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 digital NPN outputs, 24 VDC
- Max. 0.5A per output
- Simple RFID interface
- Connection of 2 BL ident® read/write heads
- Max cable length of 50 m

Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input Data Size	max. 14 register
Input register start address	0 (0x0000 hex)
Output Data Size	max. 13 register
Output register start address	2048 (0x0800 hex)

Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Device Level Ring (DLR)	supported
Class 1 connections (CIP)	6
Input Assembly Instance	103
Input Data Size	14 INT
Output Assembly Instance	104
Output Data Size	13 INT
Configuration Assembly Instance	106
Configuration Size	0
Comm Format	Data - INT


PROFINET	
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
Input Data Size	max. 24 BYTE
Output Data Size	max. 26 BYTE

Digital outputs	
Output type	NPN
Type of output diagnostics	Channel diagnostics
Sensor supply (V_{SENS})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes



Technology	
Signal type	Simple RFID interface
Number of channels	2
Sensor supply	0.5 A per channel, short-circuit proof
Simultaneity factor	1
Transmission rate	115.2 kbps
Cable length	50 m
Electrical isolation	isolation of electronics and field level via optocouplers

Dimensions	168 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	600 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus




Pinning and wiring diagram

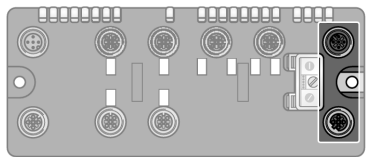



Ethernet
Fieldbus cable (IP67 example): RSSD RSSD 441-2M ID number U-02482 or RSSD-RSSD-441-2M/S2174 ID number 6914218

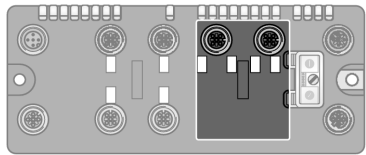


Slot 1: RFID Channels
Extension cable (example): RK 4.5T-2-RS 4.5T/S2501 ident-no. U3-01243 or RK4.5T-2-RS4.5T/S2500 ident-no. 6699200

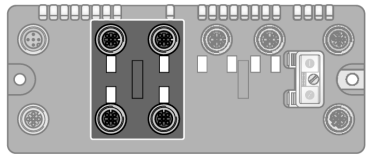

Slot 2: Digital Outputs
Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

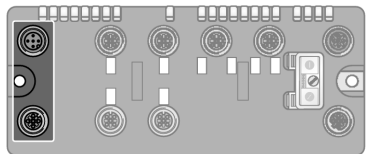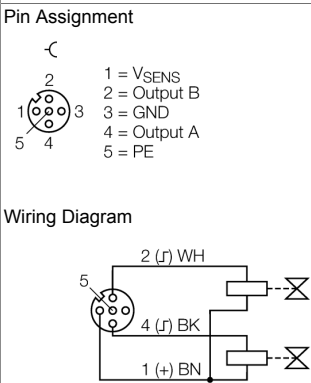

Auxiliary Power
Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208



Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	Power Off
	GREEN	ON	Connected to Master
	GREEN	FLASHING	Ready
	GREEN	FLASHING 3x (1Hz)	ARGE Running
	RED	ON	Error
	RED	FLASHING	WINK
LNK/ACT	YELLOW	ON	DHCP/BOOTP Search
		OFF	No Link
	GREEN	ON	Link
	GREEN	FLASHING	Traffic
	YELLOW	ON	100 Mbit Linked

I/O LED status slot 1

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
RW0 / RW1		OFF	No tag present, no diagnostics active
	GREEN	ON	Tag present
	GREEN	FLASHING (2 Hz)	Data communication from / to tag active
	RED	ON	Error in the R/W head
	RED	FLASHING (2 Hz)	Short circuit in the transceiver supply

* D1 LED also indicates gateway diagnostics

I/O LED status slot 2

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)

* D2 LED also indicates gateway diagnostics

Process Data Mapping of Each Protocol

EtherNet/IP™ I/O & Diagnostics Data Mapping

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 _o	0	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	1	Error Cat. (Category Code)							
	2	Error Desc. (Description Code)							
	3	-	-	-	-	-	-	-	-
	4...11	Read Data (8 Byte)							
RFID 1 _i	12	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	13	Error Cat. (Category Code)							
	14	Error Desc. (Description Code)							
	15	-	-	-	-	-	-	-	-
	16...23	Read Data (8 Byte)							
Diagnostics	24	Module number reporting diagnostic data							
	25	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot 1 (ref. Byte 24)	26	-	-	-	-	-	RFID 1 _o Trans. PS Off	-	-
	27	-	-	-	-	RFID 1 _o Trans. PS Error	-	-	RFID 1 _o Trans. Hardware Error
	28	-	-	-	-	-	RFID 1 _i Trans. PS Off	-	-
	29	-	-	-	-	RFID 1 _i Trans. PS Error	-	-	RFID 1 _i Trans. Hardware Error
Slot 2 (ref. Byte 24)	26	Over Current DO 2 _i	Over Current DO 2 _e	Over Current DO 2 _s	Over Current DO 2 _i	Over Current DO 2 _s	Over Current DO 2 _e	Over Current DO 2 _i	Over Current DO 2 _e
	27	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 _o	0	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	1	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	2	Address High Byte (MSB)							
	3	Address Low Byte (LSB)							
	4...11	Write Data (8 Byte)							
RFID 1 _i	12	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	13	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	14	Address High Byte (MSB)							
	15	Address Low Byte (LSB)							
	16...23	Write Data (8 Byte)							
	24	DO 2 _i	DO 2 _e	DO 2 _s	DO 2 _i	DO 2 _s	DO 2 _e	DO 2 _i	DO 2 _e
	25	-	-	-	-	-	-	-	-

Modbus® TCP Register Mapping

	REG	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs (RO)	0x0000	Error Cat. (Category Code)								Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	0x0001	-	-	-	-	-	-	-	-	Error Desc. (Description Code)							
	0x0002 ... 0x0005	Read Data (4 Words)															
	0x0006	Error Cat. (Category Code)								Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	0x0007	-	-	-	-	-	-	-	-	Error Desc. (Description Code)							
	0x0008 ... 0x000B	Read Data (4 Words)															
Status (RO)	0x000C	-	FCE	-	-	CFG	COM	VI low	-	VO low	-	-	-	-	-	-	DIA
Diag. (RO)	0x000D	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S2 DIA	S1 DIA
Outputs (RW)	0x0800	-	-	-	-	-	Byte CNT 2	Byte CNT 1	Byte CNT 0	Trans.	Next	Tag ID	Read	Write	Tag In-fo.	Trans. Info.	Reset
	0x0801	Address															
	0x0802 ... 0x0805	Write Data (4 Words)															
	0x0806	-	-	-	-	-	Byte CNT 2	Byte CNT 1	Byte CNT 0	Trans.	Next	Tag ID	Read	Write	Tag In-fo.	Trans. Info.	Reset
	0x0807	Address															

	0x0808 ...	Write Data (4 Words)															
	0x080B																
	0x080C	-	-	-	-	-	-	-	-	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀
I/O Diag. (RO)	0xA000	-	-	-	-	PS RFID 1 ₀	-	-	HW RFID 1 ₀	-	-	-	-	-	SCO RFID 1 ₀	-	-
	0xA001	-	-	-	-	PS RFID 1 ₁	-	-	HW RFID 1 ₁	-	-	-	-	-	SCO RFID 1 ₁	-	-
	0xA002	-	-	-	-	-	-	-	-	SCDO 2 ₇	SCDO 2 ₆	SCDO 2 ₅	SCDO 2 ₄	SCDO 2 ₃	SCDO 2 ₂	SCDO 2 ₁	SCDO 2 ₀

PROFINET® Process Data

	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Inputs	0	RFID 1 ₀ Done	RFID 1 ₀ Busy	RFID 1 ₀ Error	RFID 1 ₀ Trans. Conn.	RFID 1 ₀ Trans. On	RFID 1 ₀ TP	RFID 1 ₀ TFR	-
	1	RFID 1 ₀ Error Cat. (Category Code)							
	2	RFID 1 ₀ Error Desc. (Description Code)							
	3	-	-	-	-	-	-	-	-
	4...11	RFID 1 ₀ Read Data (8 Byte)							
	12	RFID 1 ₁ Done	RFID 1 ₁ Busy	RFID 1 ₁ Error	RFID 1 ₁ Trans. Conn	RFID 1 ₁ Trans. On	RFID 1 ₁ TP	RFID 1 ₁ TFR	-
	13	RFID 1 ₁ Error Cat. (Category Code)							
	14	RFID 1 ₁ Error Desc. (Description Code)							
	15	-	-	-	-	-	-	-	-
	16...23	RFID 1 ₁ Read Data (8 Byte)							
Outputs	0	RFID 1 ₀ Transceiver	RFID 1 ₀ Next	RFID 1 ₀ Tag ID	RFID 1 ₀ Read	RFID 1 ₀ Write	RFID 1 ₀ Tag Info.	RFID 1 ₀ Trans. Info.	RFID 1 ₀ Reset
	1	-	-	-	-	-	RFID 1 ₀ Byte Count 2	RFID 1 ₀ Byte Count 1	RFID 1 ₀ Byte Count 0
	2	RFID 1 ₀ Address High Byte (MSB)							
	3	RFID 1 ₀ Address Low Byte (LSB)							
	4...11	RFID 1 ₀ Write Data (8 Byte)							
	12	RFID 1 ₁ Transceiver	RFID 1 ₁ Next	RFID 1 ₁ Tag ID	RFID 1 ₁ Read	RFID 1 ₁ Write	RFID 1 ₁ Tag Info.	RFID 1 ₁ Trans. Info.	RFID 1 ₁ Reset
	13	-	-	-	-	-	RFID 1 ₁ Byte Count 2	RFID 1 ₁ Byte Count 1	RFID 1 ₁ Byte Count 0
	14	RFID 1 ₁ Address High Byte (MSB)							
	15	RFID 1 ₁ Address Low Byte (LSB)							
	16...23	RFID 1 ₁ Write Data (8 Byte)							
	24	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀
	25	-	-	-	-	-	-	-	-