




Bus termination resistor

PDP-TRA



- Terminating resistor for PROFIBUS-DP applications
- 5-pin, reverse-keyed, active
- M12 × 1 male connector to 7/8" male connector
- 7/8" male connector to power supply
- Protection class: IP67 (screwed together)
- Temperature: -40 °C...+75 °C
- Note: this is an active terminating resistor. Active termination is more stable than passive termination, and will likely improve performance when using higher baudrates.

Type	PDP-TRA
ID	6825346
Connector A	Male, Straight
Contact carriers	Plastic, PUR, Black
Connector body	Plastic, PUR
Protection class (When coupled)	IP67, (screwed together)
Fieldbus	PROFIBUS-DP
Mechanical and chemical properties	
Ambient temperature range (static)	-40°C...+75°C

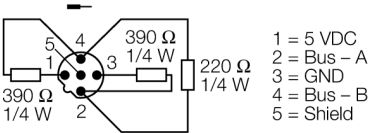

Status LED	Green	ON	Power Indication
------------	-------	----	------------------