


Compact fieldbus I/O modules for EtherNet/IP


16 digital outputs 1.4 A

FXEN-OM16-0001-IP/CS30007


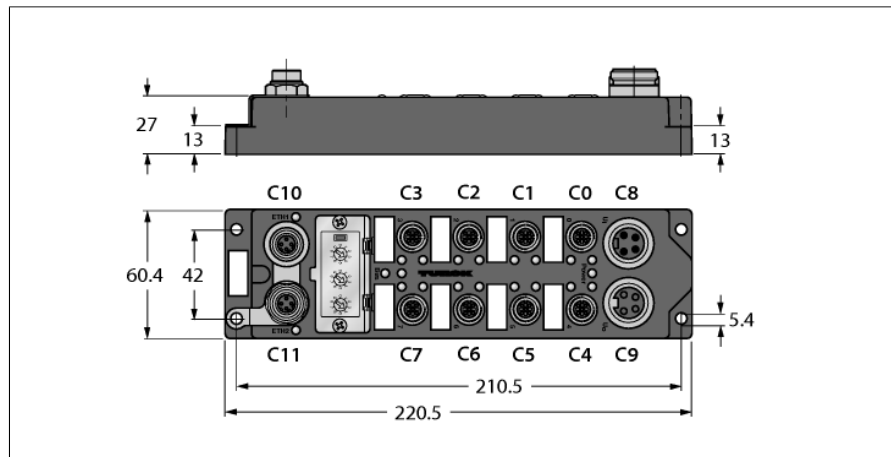


- 16 digital outputs 1.4 A
- For EtherNet/IP applications
- Integrated Ethernet switch
- Supported via FDT/DTM
- output diagnostics per channel
- two channels per connector
- Fibre-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67



Type	FXEN-OM16-0001-IP/CS30007
ID	6825436
Number of channels	16
Operating / load voltage	18...30 VDC
Operating current	< 75 mA
Voltage supply connection	2 × 7/8"
Outputs	
Number of channels	(16) DC actuators
Output voltage	18...30 VDC from load voltage
Output current per channel	1.4 A, short-circuit proof
Load type	resistive, inductive, lamp load
Simultaneity factor	0.4
Electrical isolation	galvanic isolation against Ethernet
Transmission rate Ethernet	10/100 Mbps
Addressing modes Ethernet:	Static IP, BOOTP, DHCP, PGM, PGM-DHCP
Electrical isolation	to operating and load voltage
Dimensions (W x L x H)	60 x 220.5 x 27 mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Halogen-free	yes
Mounting	4 mounting holes Ø 5,4 mm
Ambient temperature	0...+55 °C
Storage temperature	-25...+70 °C
Altitude	Max. 5000 m
Vibration test	Acc. to EN 60068-2-6
Shock test	acc. to EN 60068-2-27
Electromagnetic compatibility	Acc. to EN 61131-2
Protection class	IP67
Approvals	CE, cULus
UL Certificate	pol. deg.2, env. temp. max. 40 °C, cl.2 ps req.




Ethernet
Fieldbus cable (for example):
RSSD RSSD 441-2M
Ident-no. U-02482



Digital Outputs
Connection cable (for example):
RK 4.4T-2-RS 4.4T
Ident-no. U2445



Auxiliary Power
Connection cable (for example):
RSM RKM 40-2M
Ident-no. U2280-0



LED status module

LED	Color	Status	Description
ETH1 / ETH2	green	on	Ethernet Link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
	yellow	on	Ethernet Link (10 Mbps)
		flashing	Ethernet communication (10 Mbps)
		off	no Link
Bus	green	on	active CIP class 1 connection
		flashing	gateway ready
	red	on	gateway error found
		flashing	DHCP/BOOTP search for settings
Power	green	on	Operating and load voltage within the defined tolerances
	red	on	Load voltage below the defined tolerances
		off	Operating voltage below the defined tolerances

LED status IOs

LED	Color	Status	Description
C0.0 - C7.1	green	on	24 VDC at output
	red	on	Output overload

I/O & Diagnostics Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diagnostics	0	UL Low	-	-	-	-	-	-	Diag. Warn
	1	-	-	-	-	-	-	UB Low	-
	2	-	-	-	-	-	-	-	Diag. Active
	3	-	-	Module Error	-	-	-	-	-
	4	-	-	-	-	-	-	-	-
	5	OSC 7	OSC 6	OSC 5	OSC 4	OSC 3	OSC 2	OSC 1	OSC 0
	6	OSC 15	OSC 14	OSC 13	OSC 12	OSC 11	OSC 10	OSC 9	OSC 8
	7	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	-	-	-
	1	-	-	-	-	-	-	-	-
	2	DO 7	DO 6	DO 5	DO 4	DO 3	DO 2	DO 1	DO 0
	3	DO 15	DO 14	DO 13	DO 12	DO 11	DO 10	DO 9	DO 8