


Mounting Accessories

Mounting Kit

BTS-DSU35-Z06

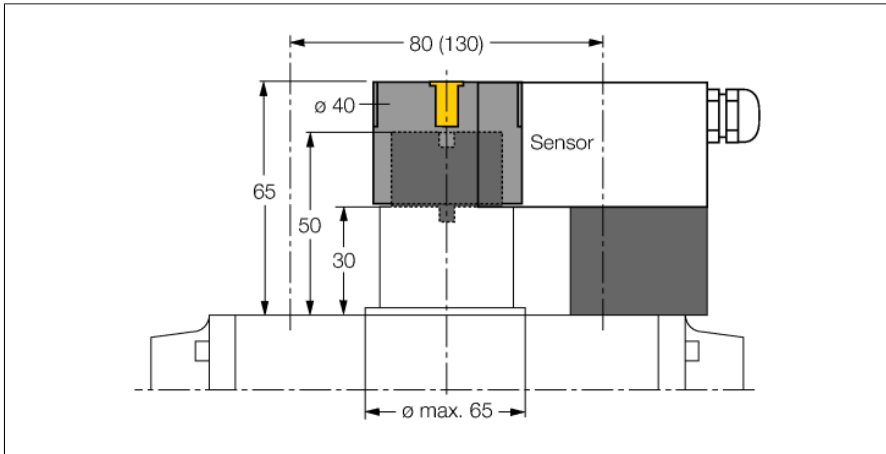

Mounting kit for larger rotary actuators:
 Ø spacer plate and snap ring: max. 65 mm
 Hole pattern on flange surface: 30 x 80 mm
 (30 x 130 mm)
 Connection shaft (shaft extension) height:
 30 mm/Ø: max. 40 mm
 Included in delivery:
 1 spacer plate Ø 30 mm (POM)
 1 spacer ring Ø 20 mm (PP-GF30)
 Mounting the spacer plate:
 2 cylinder screws M5 x 45 [DIN 912-A2]
 2 lock washers A5 [DIN 137-A2]
 Mounting the puck with spacer ring:
 1 countersunk screw M6 x 45 [DIN 7991-A2]
 The spacer ring has a 4 x 4 mm cross-shaped
 notch allowing the actuator to be mounted
 offset by 90°, suited for crosswise-mounted
 drives.

Type	BTS-DSU35-Z06
ID	6900402
Design	Accessories for dual sensors, Ni4-DSU35...
Housing material	Plastic, PP-GF30

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

