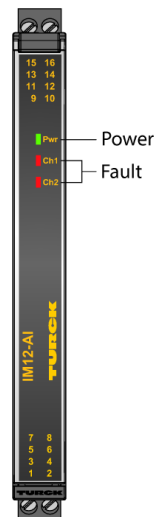
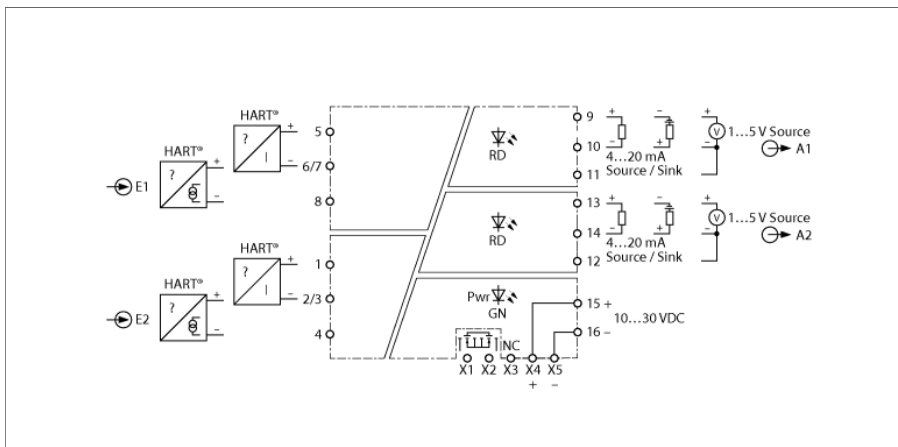


Isolating transducer 2-channel IM12-AI01-2I-2IU-HPR/24VDC/CC



The isolating transducers IM12-AI01-2I-2IU-HPR/24VDC/CC transmit analog measured signals galvanically isolated. The devices are suitable for operation in zone 2.

The 2-channel device has two inputs for the operation of HART® 2-wire transducers as well as active and passive HART® 2-wire transmitters. Connection is via removable spring type terminals. The device can be powered from a power bridge that also transmits a collective fault signal.


The device is equipped with 4...20 mA input circuits and 4...20 mA output circuits (either as source or sink) or 1...5 V (source). The input signals are transmitted 1:1 without interference within a range of 3.8...20.5 mA. In addition, digital signals can also be transmitted bidirectionally in accordance with the HART® protocol. Wire break (< 3.5 mA) and short circuit (> 22 mA) in the transducer circuit are output as current < 3.5 mA/voltage < 0.875 V.

The devices have a green power LED (Pwr). For each input circuit there is a red status LED. An error in the input circuit causes the red LED to flash according to NE44.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21.

The device is equipped with removable spring-type terminals.






- Input circuits monitored for wire-break and short-circuit
- Complete galvanic isolation
- HART transparent
- Removable spring type terminals
- Power bridge (connector incl. in delivery)
- ATEX use in Zone 2, cUL
- SIL 2

Dimensions


Type	IM12-AI01-2I-2IU-HPR/24VDC/CC
ID	7580326
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	$\leq 3.8 \text{ W}$
Power dissipation, typical	$\leq 1.9 \text{ W}$
Transmitter connection	
Supply voltage	17 V/20 mA typ.
Input current	$2 \times 4...20 \text{ mA}$
Temperature drift supply voltage	$\leq 0.03 \text{ %/K}$
Reference temperature	23 °C
Output circuits	
Output current	$2 \times \text{source/sink (15...28 V) } 4...20 \text{ mA}$
Output voltage	$2 \times 1...5 \text{ V}$
Load resistance current output	$\leq 0.8 \text{ k}\Omega$
Short-circuit	Output < 3.5 mA, if in the input circuit a current > 22 mA flows
Wire break	Output < 3.5 mA, if in the input circuit a current < 3.5 mA flows
Power-Bridge common alarm output	
	MOSFET, $U_{\text{max}} = 30 \text{ V}$, $I_{\text{max}} = 100 \text{ mA}$
Response characteristic	
Rise time (10...90 %)	$\leq 5 \text{ ms}$
Fall time (90...10 %)	$\leq 5 \text{ ms}$
Measuring accuracy (including linearity, hysteresis and repeatability)	$\leq 0.05 \text{ % of full scale}$
Reference temperature	23 °C
Temperature drift	$\leq 0.002 \text{ % of full scale/K}$
Galvanic isolation	
Test voltage	2.5 kV RMS
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 2 to output 2	375 V peak value acc. to EN 60079-11
Input 1 to supply	375 V peak value acc. to EN 60079-11
Input 2 to supply	375 V peak value according to EN 60079-11
Output 1 to supply	50 V RMS acc. to EN 50178 and EN 61010-1
Output 2 to supply	50 V RMS acc. to EN 50178 and EN 61010-1
Output 1 to output 2	50 V RMS according to EN 50178 and EN 61010-1
Input 1 to input 2	60 V peak value acc. to EN 60079-11
Important note	
	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Important note	
	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Error indication	red

Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Ambient temperature	-25...+70 °C	
Storage temperature	-40...+80 °C	
Dimensions	120 x 12.5 x 128 mm	
Weight	182 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable spring-type terminals, 2-pin	
Connection variant	Power bridge with collective fault signal	
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident-No.		Dimension drawing
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	
IMX12-PS02-UI-UIR-PR/24VDC/CC	7580611	Power supply module power bridge; Collective fault signal via relay; Single and redundant power supply via terminals; Removable screw terminals	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	