


Coupling Relay

2-channel

IMX12-CD01-2R-2U-0/L/CC

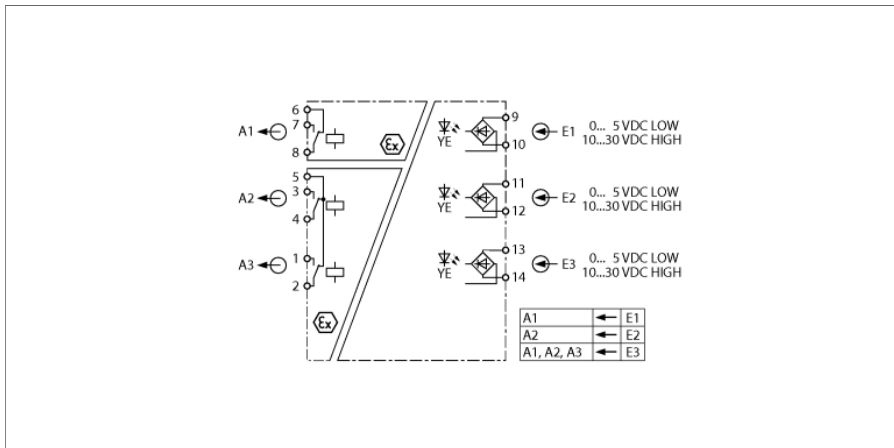

The IMX12-CD01-2R-2U-0/L/CC relay coupler switches intrinsically safe circuits on the field side and ensures a safe galvanic isolation between the input and output circuits (relay). Possible applications include, for example, remote resetting, fire alarm testing or remote calibration of strain gages. The device is suitable for use in Zone 2. The device also enables the creation of safety-related applications up to and including SIL3 (high and low demand in accordance with IEC 61508).

The relay coupler is equipped with three relay outputs (changeover contacts). The input signals are interpreted as low or high signals depending on the input level, and provided as a corresponding output signal. The inputs are not polarized. Input E1 and input E2 switch output A1 and output A2 respectively. Input E3 controls output A1, output A2 and output A3 simultaneously. The device is powered through the input signal (loop-powered).

The switching status of the output is indicated by three yellow LEDs (Rel...).

If applied in SIL-3 circuits, the following conditions have to be observed:

- Input E1 and input E2 switch the respective output (A1 or A2) separately.
- If the output relay triggers a contactor directly: Equip the contactor with protective circuitry at the coil.
- Connect both relays in series.
- Equip the output relay with a fuse that is activated when 60% of the nominal current is achieved.


The device is available in a two-channel design for SIL-2 applications.

The device is equipped with removable spring type terminals.

- The inputs are not polarized
- With input E1 and input E2, the associated output switches separately
- NE load connection: SIL 3 Safety Function for NE (Normally Energized) load (de-energized in safe state) is available
- ND load connection: SIL 3 Safety Function for ND (Normally De-Energized) load (energized in safe state) is available
- The device is available in a two-channel design for SIL 2 applications
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable spring type terminals
- ATEX, IECEx, NEPSI, cUL, cFM, IN-METRO, Kosha
- Use in Zone 2
- SIL 3



Dimensions



Output relay – Load curve



Type	IMX12-CD01-2R-2U-0/L/CC
ID	7580621
0-signal	0...5 VDC
1-signal	10...30 VDC
Voltage input	Max. 30 VDC
Output circuits	
Output circuits (digital)	3 x relays (change-over)
Output switching voltage relay	$\leq 30\text{ VDC} / \leq 250\text{ VAC}$
Switching current per output	$\leq 2\text{ A}$
Switching capacity per output	$\leq 500\text{ VA}/60\text{ W}$
Switching frequency	$\leq 15\text{ Hz}$
Galvanic isolation	
Test voltage	2.5 kV RMS
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 16 ATEX 186482 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex ec [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 3 acc. to IEC 61508
Displays/Operating elements	
Switching state	Yellow

Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Ambient temperature	-25...+70 °C	
Storage temperature	-40...+80 °C	
Dimensions	120 x 12.5 x 128 mm	
Weight	180 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable spring-type terminals, 2-pin	
Terminal cross-section	0.2...2.5 mm² (AWG: 24...14)	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident-No.		Dimension drawing
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	