


RSF 66-xM

Actuator and Sensor Receptacle – Front Mount

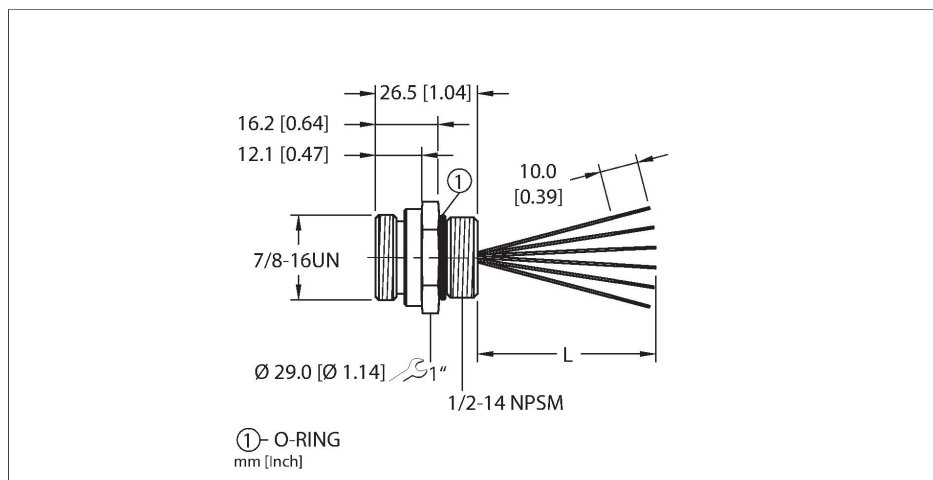

Technische Daten


Type	RSF 66-xM
ID	777003090
Connector A	Male, 7/8"-16 UN
Number of contacts	6
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.8 ... 2 Nm (note max. torque of mating connector!)
Mounting orientation	Front mount
Panel seal	O-ring, Plastic, NBR
Mounting thread	1/2"-14 NPSM
Receptacle mounting torque	6.8...27.1 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K NEMA: 1, 3, 4, 6P, 12
Total number of conductors	6
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	16 AWG [Similar to 1.50 mm²]
Conductor colors	WH, RD, GN/YE, OG, BK, BU
Electrical properties at +20 °C	
Rated voltage	600 V

Features


- UL, CE, RoHS compliant, IP67
- Female 7/8" minifast Receptacle, 6 pin
- Mounting thread: 1/2"-14 NPSM

Contact assignment

Connector A



Circuit Diagram



Technische Daten

Current	8 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+105 °C
Approvals	UL 2238 CSA C22.2 No. 182.3 CE RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	

Front panel mounting

