



# RSM 40-xM/S101

## Actuator and Sensor Cable – Connection Cable

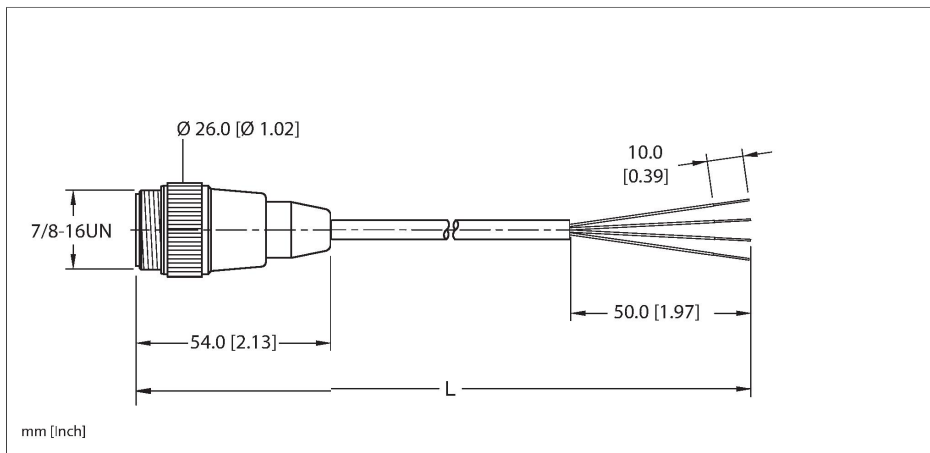

### Technische Daten


|                                 |                                   |
|---------------------------------|-----------------------------------|
| Type                            | RSM 40-xM/S101                    |
| ID                              | 777008691                         |
| Special version                 | S101 = Flexlife - High flex cable |
| Connector A                     | Male, 7/8"-16 UN, Straight        |
| Number of contacts              | 4                                 |
| Contacts                        | Brass, CuZn, Gold-plated          |
| Contact carriers                | Plastic, TPU, Yellow              |
| Connector body                  | Plastic, TPU, Yellow              |
| Coupling nut                    | Brass, CuZn, Nickel-plated        |
| Tightening torque               | 2 Nm                              |
| Mechanical life                 | > 100 Mating cycles               |
| Pollution degree                | 3                                 |
| Protection class (When coupled) | IP67, IP68, IP69, IP69K           |
|                                 | NEMA: 1, 3, 4, 6P, 12             |
| <b>Cable data</b>               |                                   |
| Cable ID                        | RF50968                           |
| Total number of conductors      | 4                                 |
| Cable diameter                  | Ø 6.2 mm                          |
| Cable jacket                    | TPE, Yellow                       |
| Conductor diameter              | 0.066 "                           |
| Conductor material              | TC (tinned copper)                |
| Conductor insulation material   | TPC-ET                            |
| Conductor size                  | 4 x 18 AWG [Similar to 0.75 mm²]  |
| Number of strands x O.D.        | 65 x 36 AWG                       |

### Features



- 7/8" Male, Straight, 4-pin
- Yellow TPE jacket, 4X18 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1
- Flexlife® and C-Track Approved

### Cable cross section

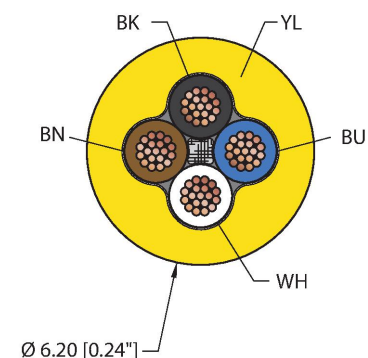


### Contact assignment

Technische Daten

|                                     |                                                                                                                                                                                      |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conductor colors                    | BN, WH, BU, BK                                                                                                                                                                       |
| Electrical properties at +20 °C     |                                                                                                                                                                                      |
| Rated voltage                       | 600 V                                                                                                                                                                                |
| Current                             | 9 A                                                                                                                                                                                  |
| Mechanical and chemical properties  |                                                                                                                                                                                      |
| Bending radius (static)             | ≥ 5 x Ø                                                                                                                                                                              |
| Bending radius (dynamic)            | ≥ 10 x Ø                                                                                                                                                                             |
| Torsion rating                      | Max. 20 million                                                                                                                                                                      |
| UL cold bend rating                 | -40 °C                                                                                                                                                                               |
| Flex rating 10 x Ø                  | 20 million cycles                                                                                                                                                                    |
|                                     | *When properly installed @ 20°C, 50%RH, and a cycle speed of ≤0.5 cycles per second.                                                                                                 |
| C-Track                             | Yes                                                                                                                                                                                  |
| Ambient temperature range (static)  | -40...+105 °C                                                                                                                                                                        |
| Ambient temperature range (dynamic) | 5...+105 °C                                                                                                                                                                          |
| Temperature range (installation)    | -10...+105 °C                                                                                                                                                                        |
| Approval                            |                                                                                                                                                                                      |
| Approvals                           | UL 2238<br>CSA C22.2 No. 182.3<br>CE<br>UKCA<br>RoHS                                                                                                                                 |
| Note                                |                                                                                                                                                                                      |
|                                     | - Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius. |
|                                     | - We reserve the right to make technical alterations without prior notice.                                                                                                           |

Connector A



Circuit Diagram

