


# Accessories

## Smart Plug


### Rotation Speed Monitor

#### SPF1-AN6X

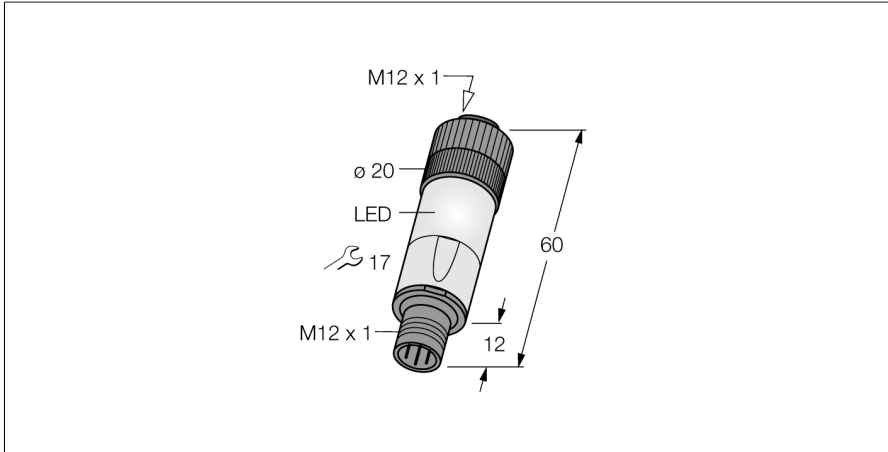

- multifunctional adapter for connection to standard sensors
- Degree of protection IP67
- 4-pin M12 x 1, female connector
- 4-pin M12 x 1, male connector

#### Wiring Diagram

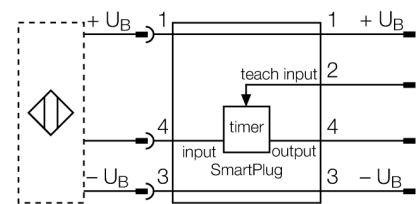

Type	SPF1-AN6X
ID	A0602
Operating voltage	10...30 VDC
Output function	4-wire
Insulation class	□
Dimensions	60 mm
Housing material	Plastic, PBTP
Ambient temperature	0...+60 °C
Protection class	IP67

#### Functional principle

The SmartPlug SPF1-AN6X monitors the frequency of incoming signals. Should the actual frequency be 5% below the programmed frequency, the output of the SmartPlug is activated.

## Function accessories

Type code	Ident-No.		Dimension drawing
VB2-SP1	A3501-29	Teach adapter	 <p>Technical drawing of the VB2-SP1 Teach adapter. The drawing shows a cylindrical component with various diameters and lengths. Key dimensions include:         <ul style="list-style-type: none"> <li>Overall length: 0.2 m</li> <li>Top diameter: <math>\phi 4.5</math> [0.18]</li> <li>Second diameter: <math>\phi 8</math> [0.31]</li> <li>Third diameter: <math>\phi 5.1</math> [0.20]</li> <li>Fourth diameter: <math>\phi 14.5</math> [0.57]</li> <li>Lengths: 23 [0.91], 38 [1.50], 39.3 [1.55], 18 [0.71], 42.5 [1.67], 12.7 [0.50], 13 [0.51], 20 [0.79]</li> <li>Threaded sections: M12 x 1</li> <li>Labels: P1, J1</li> </ul> </p>