


# Accessories

## Smart Plug


### Rotation Speed Monitor

#### SPF1-AP6X

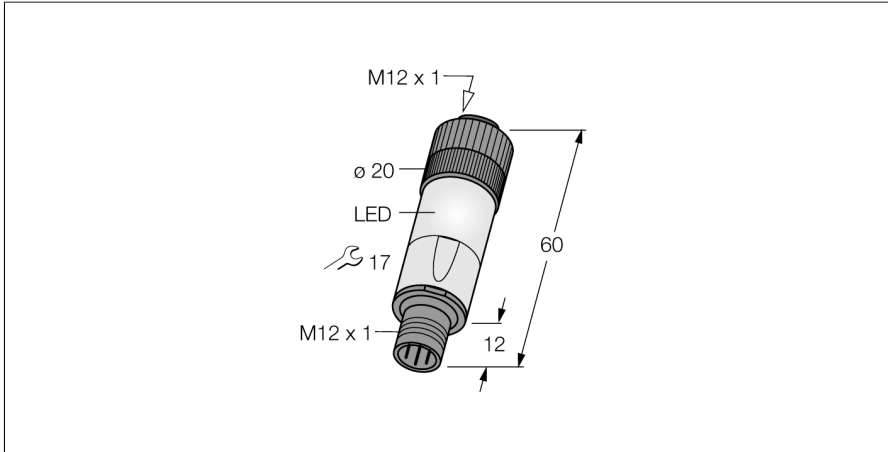

- multifunctional adapter for connection to standard sensors
- Degree of protection IP67
- 4-pin M12 x 1, female connector
- 4-pin M12 x 1, male connector

#### Wiring Diagram

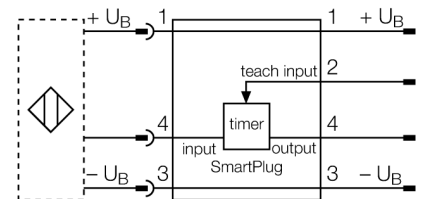

Type	SPF1-AP6X
ID	A0622
Operating voltage	10...30 VDC
Output function	4-wire
Insulation class	□
Dimensions	60 mm
Housing material	Plastic, PBTP
Ambient temperature	0...+60 °C
Protection class	IP67

#### Functional principle

The SmartPlug SPF1-AP6X monitors the frequency of incoming signals. Should the actual frequency be 5% below the programmed frequency, the output of the SmartPlug is activated.

## Function accessories

Type code	Ident-No.		Dimension drawing
VB2-SP1	A3501-29	Teach adapter	 <p>The drawing shows a cylindrical component with a length of 0.2 m. It features a central bore with a diameter of 4.5 mm (0.18 inches) and a larger diameter section of 14.5 mm (0.57 inches). The drawing includes various other dimensions such as 23 mm (0.91 inches), 38 mm (1.50 inches), 39.3 mm (1.55 inches), 25 mm (0.98 inches), 12.7 mm (0.50 inches), 13 mm (0.51 inches), 18 mm (0.71 inches), 42.5 mm (1.67 inches), 5.1 mm (0.20 inches), and 20 mm (0.79 inches). It also indicates thread specifications of M12 x 1 and connector types P1 and J1.</p>