


I/O Module for DeviceNet Fieldbus




8 configurable channels

FDNQ-XSG08-T

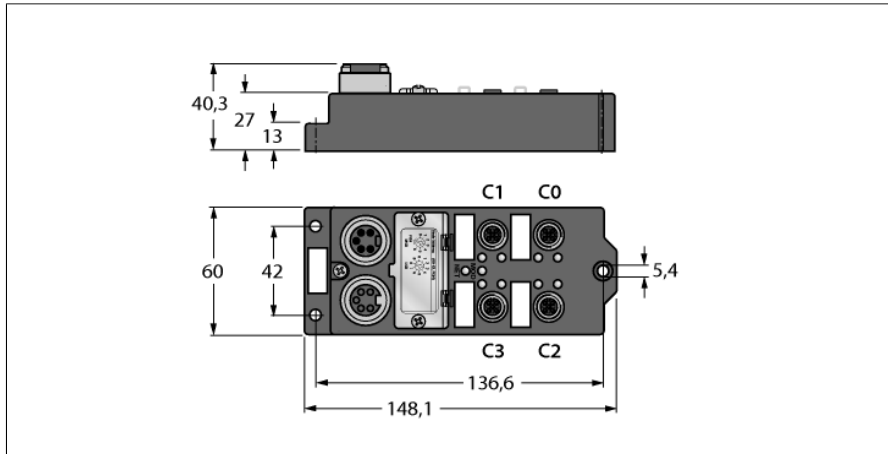

- common diagnostics for inputs and outputs
- I/O function can be parameterised
- 8 inputs 2/3-wire PNP
- 8 outputs 0.5 A
- Fiber-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connectors
- Degree of protection IP67

Fieldbus

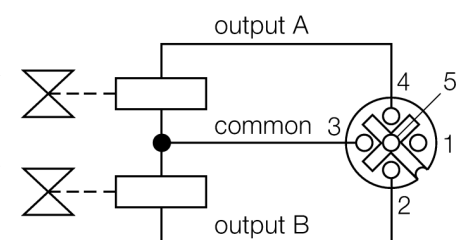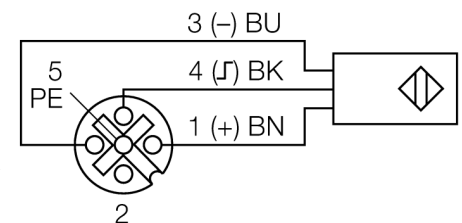

Type	FDNQ-XSG08-T
ID	F0134
Number of channels	8
Number of channels	8
Output current per channel	0.5
Sensor supply	Bus
Actuator power supply	Bus
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Dimensions (W x L x H)	60.4 x 148.1 x 27 mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Protection class	IP67