


I/O Module for DeviceNet Fieldbus

12 digital pnp inputs

4 digital outputs 2 A

FDNL-S1204H-0153

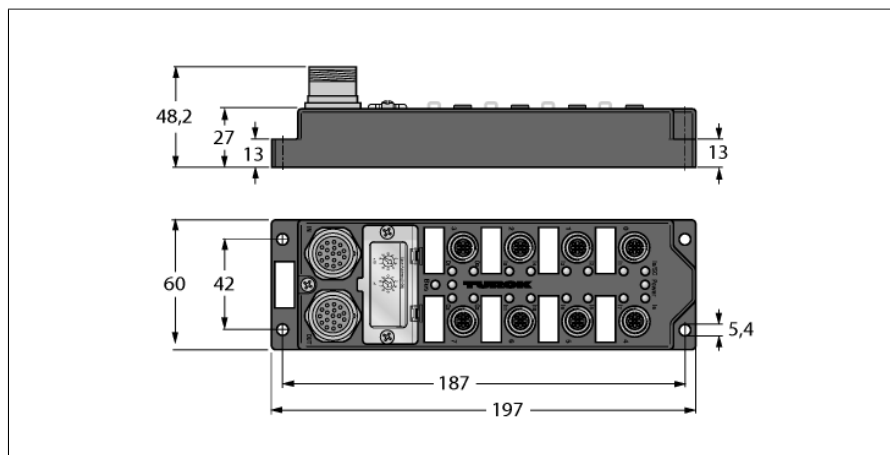

- For robot applications
- Robust electromechanics
- High magnetic field immunity
- Intelligent terminating resistor
- Module-related diagnostics
- Short-circuit - group signal
- Fiber-glass reinforced housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67

Functional principle

The FDNL-S1204H-0153 is a compact fieldbus I/O module for DeviceNet and especially designed for robotic systems resp. automatic tool changers. The module is available in degree of protection IP67 and features 12 digital pnp inputs and 4 digital 2A outputs.


DeviceNet and power supply are jointly connected via a multibus cable with M23 connection technology which was especially developed for robotic applications.

Due to the target application, the module also features an intelligent terminating resistor. The terminating resistor is automatically connected if the roboter module is the last slave at the DeviceNet branch. Once a further DeviceNet slave is added, the terminating resistor is automatically disconnected. Automatic connection of the internal terminating resistor is always carried out, if pin 15 and 16 of the M23 coupling (OUT) are not short-circuited.

The diagnostic message of the load voltage can be activated or deactivated via EDS parameterization.

Type	FDNL-S1204H-0153
ID	F0153
Number of channels	16
Operating / load voltage	18...30 VDC
Operating current	< 150 mA
Configuration file	FDNL-S1204H-0153_R3.eds
Inputs	
Input voltage	18...30 VDC from operating voltage UB
Supply current	120 mA per port, short-circuit proof
Switching threshold	EN 61131-3 low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Switching frequency	≤ 100 Hz
Max. input current	7 mA
Electrical isolation	galvanic isolation against the bus
Outputs	
Outputs	(4) DC actuators
Output voltage	24 VDC
Output current per channel	2.0 A, short-circuit proof
Load type	resistive, inductive, lamp load
Switching frequency	≤ 100 Hz
Simultaneity factor	1
Electrical isolation	galvanic isolation against the bus
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Electrical isolation	to operating and load voltage


Dimensions (W x L x H)	60 x 197 x 40 mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Ambient temperature	-40...+70 °C
Protection class	IP67
Approvals	CE, UL, CSA, FM

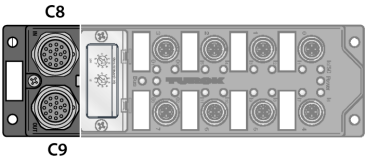



Accessories
Multibus robot cable (example):
The robot cables are exclusively sold by Ernst & Engbring GmbH & Co. KG.
Field-wireable M23 male connector:
M23, 17-pin, straight:
100020364 FW-CRKSM1717-P-C-0315
100020365 FW-CRSSM1717-P-C-0315
M23, 17-pin, angled:
100020366 FW-CWKSM1717-P-C-0314
100020367 FW-CWSSM1717-P-C-0314

M23 x 1 Fieldbus	
17-pole round connector	
IN	OUT
1	1 0 V (GND)
2	2 0 V (GND)
3	3 24 VDC (U _L)
4	4 24 VDC (U _B)
5	5 PE
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13 CAN_H
14	14 CAN_L
15	15 reserved
16	16 reserved
17	17


— C8 C9

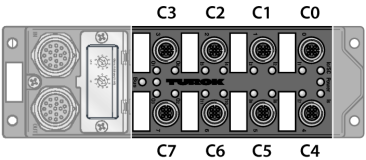

Accessories
Sensor/actuator cable (example):
6630869 RKC5.501T-5-RSC5.501T/TXL

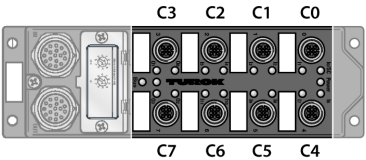

Accessories
Sensor/actuator cable (example):
6630869 RKC5.501T-5-RSC5.501T/TXL



LED status module

LED	Color	Status	Description
NET	green	on	Established connection
		flashing	Waiting for link connection
	red	on	Connection cannot be established
		flashing	Connection time-out
MOD	green	on	Error-free operation
		flashing	Searching transmission rate
	red	flashing	Short-circuit resp. overload at inputs
SC	red	on	Short-circuit group signal, inputs
Power	green	on	Operating and load voltage within the defined tolerances
	red	on	Load voltage below the defined tolerances
		off	Operating voltage below the defined tolerances

LED status IOs

LED	Color	Status	Description
Inputs	green	off	Input undamped (low)
		on	Input damped (high)
	red	off	Inputs are not short-circuit protected
		on	Short-circuit resp. overload sensor supply
Outputs	green	off	Output undamped (low)
		on	Output damped (high)
	red	off	Output not short-circuited
		on	Output short-circuited

I/O and diagnostic display

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input	0	C4P2	C4P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
	1	SC	-	-	-	C6P2	C6P4	C5P2	C5P4
Output	0	-	-	-	-	C7P2	C7P4	C3P2	C3P4

C2P4 - male connector 2 / pin 4

SC - short-circuit - group signal