


LT6E-Q21R-LU0X3-H1151



Magnetically actuated linear position sensor

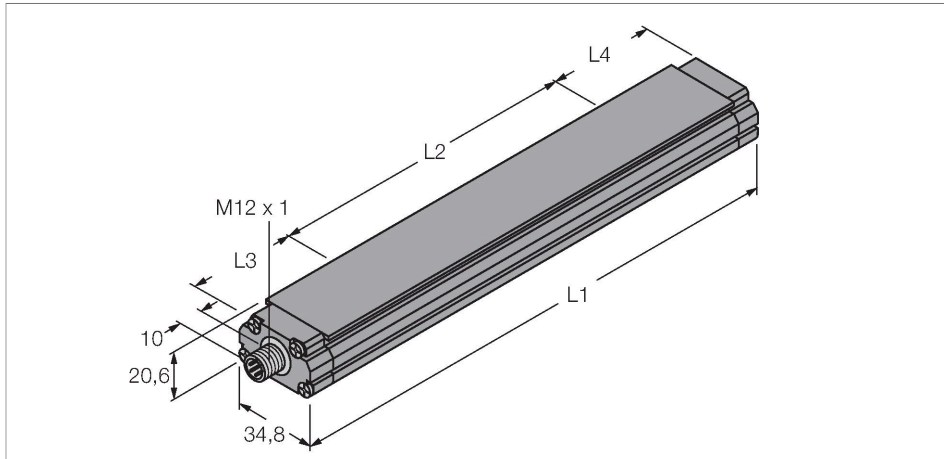

Features

- EZ-Track Linear Displacement Transducer
- High repeatability
- Extremely high linearity
- Programmable measuring range
- Invertible output signal
- Analog output 0...10 VDC
- Male connector M12 x 1

Wiring diagram




Technical data

Type	LT6E-Q21R-LU0X3-H1151
ID	LT0337
Measuring principle	Magnetostrictive
General data	
Measuring range	152.4 mm
Resolution	12 bit
Blind zone connector end L3	76.2 mm
Blind zone non-connector end L4	38.1 mm
Repeat accuracy	≤ 0.01 % of full scale
Electrical data	
Operating voltage U_b	10...30 VDC
No-load current	≤ 80 mA
Short-circuit protection	yes/Cyclic
Wire break/reverse polarity protection	yes (voltage supply)
Output function	4-wire, Analog output
Voltage output	0...10 V
Mechanical data	
Design	Profile, Q21
Dimensions	279.4 x 34.8 mm
Housing material	Metal, AL, Anodized
Electrical connection	Connector, M12 x 1
Environmental conditions	
Ambient temperature	-40...+70 °C
Vibration resistance	20 Hz (1 mm)

Functional principle

Magnetostrictive linear position sensors with analog output provide a signal that is proportional to the travel distance. Simple control tasks can thus be accomplished. These sensors feature an excellent repeat accuracy, resolution and linearity. Due to their extremely robust design, they are especially suited for industrial applications. They also excel in their high electromagnetic compatibility and stability over a wide temperature range. The sensors operate on the non-contact function principle and are thus wear and maintenance free.

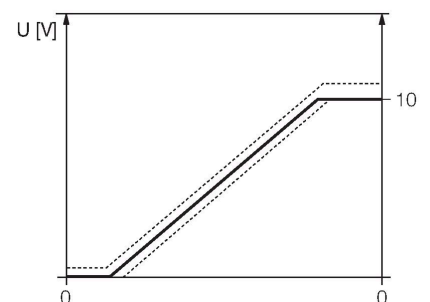

LT6E-Q21R-LU0X3-H1151 | 06/17/2026 21-38 | technical changes reserved


Technical data

Shock resistance	40 g (11 ms)
Protection class	IP67
Switching state	3-color LED, Green/yellow/red

Accessories


MB-Q21 6900279

Mounting bracket for side mounting of Q25L and Q21 linear position sensors; material: Stainless steel




FM-Q21 6900244

Floating positioning element; this can be installed up to 9 mm away from the sensor



SM-Q21 6900245

Guided positioning element; this is inserted in the groove of the sensor



TB3LIU 6900298

Test and programming device for commissioning and testing the sensor, the measuring range of the standard version can be programmed with this device

