


GRY,TPU,1STPX15+1STPX18,S-DFB,AWM,DN
Fieldbus Technology Cable – Reelfast™ Bulk Cable

Features



- Shielded Twisted Pair
- Fieldbus Technology Cable
- fieldbus type: DeviceNet™, TPU jacket, Gray, shielded, 1STPX15+1STPX18 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL 1061, CSA FT1
- UL/CSA AWM 300V

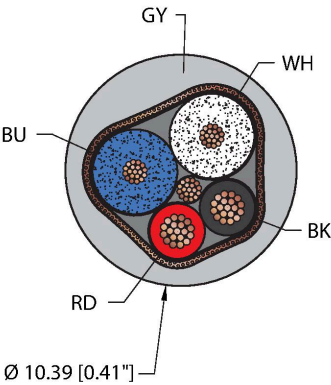

Technische Daten

Type	GRY,TPU,1STPX15+1STPX18,S-DFB,AWM,DN
ID	RF50633
Cable data	
Cable Platform	Fieldbus Technology Cable
Fieldbus	DeviceNet, 575
Total number of conductors	4
Cable diameter	Ø 10.39 mm
Cable jacket	TPU, Gray
Shielding	Aluminum (Double-sided), 36 AWG, TC (Tinned Copper), 65% coverage, 18 AWG, TC (Tinned Copper)
Conductor material	TC (tinned copper)
Conductor colors	BK, RD, BU, WH
Sub assembly 1	
Description of assembly	STP (Shielded Twisted Pair)
Number of pairs	1
Conductor diameter	0.098 "
Conductor insulation material	PVC
Assembly foil	Foil (OUT)
Cable conductor cross-section	2x15 AWG [Similar to 2.00 mm²]
Number of strands x O.D.	19x0.0131 "
Description of assembly	STP (Shielded Twisted Pair)
Number of assemblies	1
Conductor diameter	0.135 "

GRY,TPU,1STPX15+1STPX18,S-DFB,AWM,DN 22-02-2025 02-02 | Technische Änderungen vorbehalten

Technische Daten

Conductor insulation material	Foamed HDPE
Assembly foil	Foil (OUT)
Cable conductor cross-section	2x18 AWG [Similar to 0.75 mm²]
Number of strands x O.D.	19x0.0092
Weight	0.336 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL/CSA AWM 300V
Dielectric withstand (min.)	2 KVAC
Damping	0.40 dB/100ft @ 1MHz
Skew	0.75
DC resistance (max)	7.06 Ω/1000ft max.
Nom. Capacitance	12 pF/ft nom.
Nom. Impedance	120 Ω ± 10% @ 1 MHz
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+80 °C
Ambient temperature range (dynamic)	-40...+80 °C
Temperature range (installation)	-20...+80 °C
Approval	
UL Approvals	UL 758 AWM 20233
CSA Approvals	CSA AWM I/II A/B CSA FT1
Compliances	RoHS CE
Note	
- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius. - We reserve the right to make technical alterations without prior notice.	