


# YEL,PVC,4X24,CL2

## General Purpose Cable – Reelfast™ Bulk Cable



### Features

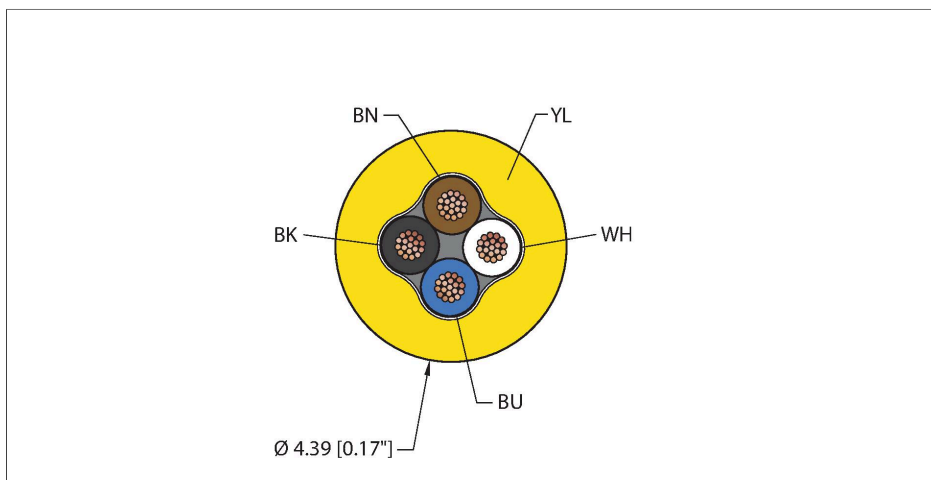

- General Purpose Cable
- Yellow PVC jacket, 4X24 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- CL2 150V
- UL/CSA AWM 300V

### Technische Daten

Type	YEL,PVC,4X24,CL2
ID	RF50822
<b>Cable data</b>	
Cable Platform	General Purpose Cable
Total number of conductors	4
Cable diameter	Ø 4.39 mm
Cable jacket	PVC, Yellow
Conductor diameter	0.038 "
Conductor material	TC (tinned copper)
Conductor insulation material	SR-PVC
Conductor size	4 x 24 AWG [Similar to 0.25 mm <sup>2</sup> ]
Number of strands x O.D.	19 x 36 AWG
Conductor colors	BN, WH, BU, BK
Weight	0.062 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	CL2 150V UL/CSA AWM 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	25.67 Ω/1000ft max.
<b>Mechanical and chemical properties</b>	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+105 °C

## Technische Daten

Ambient temperature range (dynamic)	-40...+105 °C
Temperature range (installation)	-20...+105 °C
<b>Approval</b>	
UL Approvals	UL 13 CL2 Sunlight Resistant UL 758 AWM 2517
CSA Approvals	CSA AWM I/II A/B CSA FT4
Compliances	RoHS CE
<b>Note</b>	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.