


# BLK,TPE,4X12,TCERDB,STOOW

## Power Tray/Exposed Run/Direct Burial Cable – Reelfast™ Bulk Cable



### Features

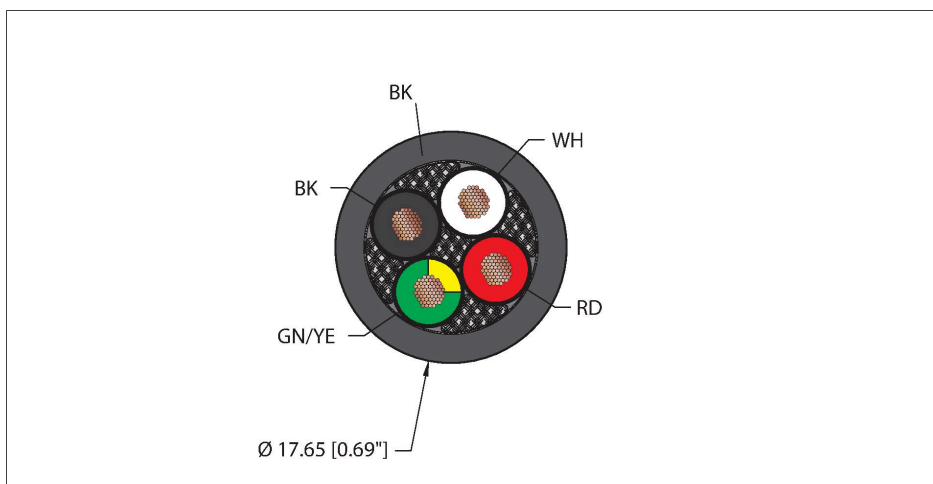

- Power Tray/Exposed Run/Direct Burial Cable
- Black TPE jacket, 4X12 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL 1100, CSA FT1, CSA FT4
- WTTC 1000V
- TC 600V
- UL STOOW 600V
- CIC/TC 600V

### Technische Daten

Type	BLK,TPE,4X12,TCERDB,STOOW
ID	RF51668
<b>Cable data</b>	
Cable Platform	Power Tray/Exposed Run/Direct Burial Cable
Total number of conductors	4
Cable diameter	Ø 17.65 mm
Cable jacket	TPE, Black
Conductor diameter	0.202 "
Conductor material	BC (bare copper)
Conductor insulation material	PVC/Nylon (Nylon overcoat)
Conductor size	4 x 12 AWG [Similar to 4.00 mm <sup>2</sup> ]
Number of strands x O.D.	65 x 30 AWG
Conductor colors	WH, RD, GN/YE, BK
Weight	1.021 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	WTTC 1000V TC 600V UL STOOW 600V CIC/TC 600V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	1.7 Ω/1000ft max.
<b>Mechanical and chemical properties</b>	
Bending radius (static)	≥ 5 x Ø

BLK,TPE,4X12,TCERDB,STOOW | 22-02-2025 02-08 | Technische Änderungen vorbehalten

## Technische Daten

Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+90 °C
Ambient temperature range (dynamic)	5...+90 °C
Temperature range (installation)	-10...+90 °C
<b>Approval</b>	
UL Approvals	UL 2277 WTTC UL 1277 TC Exposed Run Direct Burial Sunlight Resistant Oil Res I Oil Res II UL 62 STOOW -40C Cold Bend
CSA Approvals	CSA C22.2 No.239 CIC & CSA C22.2 No.230 TC CSA FT1 CSA FT2 CSA FT4 Sunlight Resistant
Compliances	RoHS CE
<b>Note</b>	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.