


GRY,PVC,4X20,CMR
General Purpose Cable – Reelfast™ Bulk Cable

Features



- General Purpose Cable
- Gray PVC jacket, 4X20 AWG
- Flame Ratings: UL 1666
- CL3R 300V
- CMR 300V

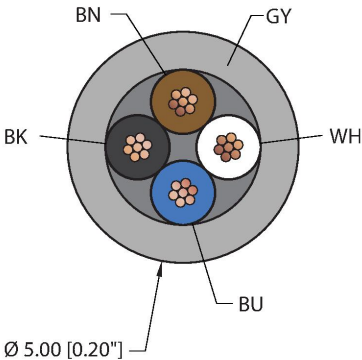

Technical data

Type	GRY,PVC,4X20,CMR
ID	RF51772
Cable data	
Cable Platform	General Purpose Cable
Total number of conductors	4
Cable diameter	Ø 5 mm
Cable jacket	PVC, Gray
Conductor diameter	0.056 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	4 x 20 AWG [Similar to 0.50 mm²]
Number of strands x O.D.	7 x 28 AWG
Conductor colors	BN, WH, BU, BK
Weight	0.1 lbs. /meter
Electrical properties at +20 °C	
Voltage	CL3R 300V CMR 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	11.2 Ω/1000ft max
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Ambient temperature range (static)	-40...+105 °C
Ambient temperature range (dynamic)	-40...+105 °C
Temperature range (installation)	-20...+105 °C

GRY,PVC,4X20,CMR| 04/16/2025 16:09 | technical changes reserved

Technical data

Approval	
UL Approvals	CL3R UL 444 CMR
Compliances	RoHS CE
Note	
- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.	
- We reserve the right to make technical alterations without prior notice.	