


GRY,PVC,3STPX22,S-DB,ITC Instrumentation Tray Cable – Reelfast™ Bulk Cable



Features

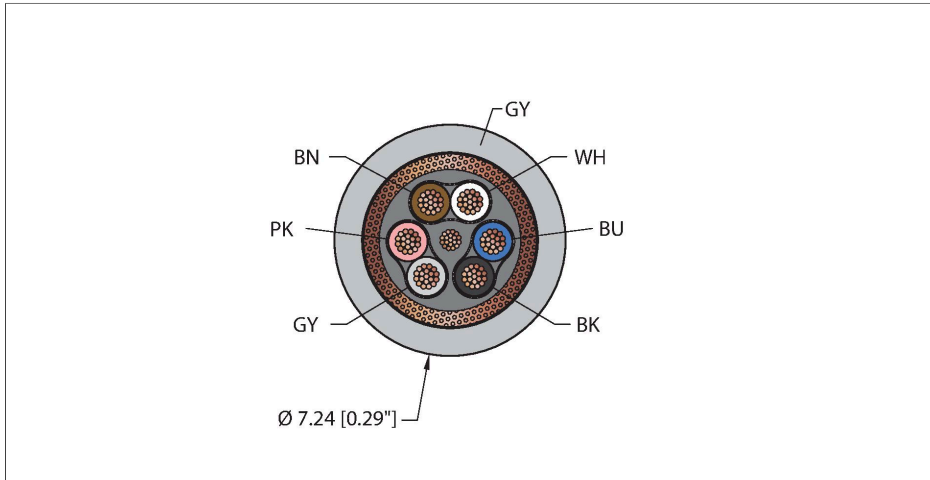

- Shielded Twisted Pair
- Instrumentation Tray Cable
- Gray PVC jacket, shielded, 3STPX22 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- ITC 150V
- PLTC 300V
- UL/CSA AWM 300V
- CMX OUTDOOR 300V
- CMG 300V

Technische Daten

Type	GRY,PVC,3STPX22,S-DB,ITC
ID	RF51964
Cable data	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	6
Cable diameter	Ø 7.24 mm
Cable jacket	PVC, Gray
Shielding	38 AWG, TC (Tinned Copper), 65% coverage, 24 AWG, TC (Tinned Copper)
Conductor material	TC (tinned copper)
Conductor colors	BN, WH, BU, BK, GY, PK
Description of assembly	STP (Shielded Twisted Pair)
Number of pairs	3
Conductor diameter	0.054 "
Conductor insulation material	PVC
Assembly foil	Aluminum/polyester (OUT)
Cable conductor cross-section	2x22 AWG [Similar to 0.34 mm ²]
Number of strands x O.D.	19x0.0058 "
Weight	0.175 lbs. /meter
Electrical properties at +20 °C	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 300V CMX OUTDOOR 300V CMG 300V

GRY,PVC,3STPX22,S-DB,ITC | 22-02-2025 01-55 | Technische Änderungen vorbehalten

Technische Daten

Dielectric withstand (min.)	2 KVAC
DC resistance (max)	17.5 Ω /1000ft max.
Mechanical and chemical properties	
Bending radius (static)	$\geq 5 \times \varnothing$
Bending radius (dynamic)	$\geq 15 \times \varnothing$
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+105 °C
Ambient temperature range (dynamic)	-40...+105 °C
Temperature range (installation)	-20...+105 °C
Approval	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2517
CSA Approvals	CSA AWM I/II A/B CMX OUTDOOR-CMG CSA FT4
Compliances	RoHS CE
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.