


BLK,TPU,11X18,AWM,HF
Halogen Free Cable – Reelfast™ Bulk Cable

Features



- Halogen Free Cable
- TPU jacket, Black, 11X18 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1
- UL/CSA AWM 300V
- Halogen Free

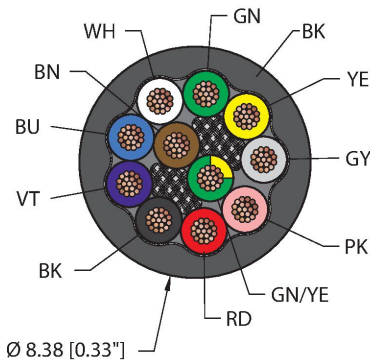

Technical data

Type	BLK,TPU,11X18,AWM,HF
ID	RF51998
Cable data	
Cable Platform	Halogen Free Cable
Total number of conductors	11
Cable diameter	Ø 8.38 mm
Cable jacket	TPU, Black
Conductor diameter	0.062 "
Conductor material	TC (tinned copper)
Conductor insulation material	PP
Conductor size	11 x 18 AWG [Similar to 0.75 mm²]
Number of strands x O.D.	19 x 0.0092 "
Conductor colors	GNYE, BN, WH, GN, YE, GY, PK, RD, BK, VT, BU
Weight	0.295 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL/CSA AWM 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	7.22 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40...+80 °C

BLK,TPU,11X18,AWM,HF| 09/11/2025 17-14 | technical changes reserved

Technical data

Ambient temperature range (dynamic)	-40...+80 °C
Temperature range (installation)	-20...+80 °C
Approval	
UL Approvals	UL 758 AWM 20549
CSA Approvals	CSA AWM I/II A/B CSA FT2
Compliances	RoHS CE
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.