


FKFD 4.5-5 Actuator and Sensor Receptacle - Rear Mount





Туре	FKFD 4.5-5
ID	U-01720
Connector A	Female, M12 × 1, A-code
Design specification	Acc. to IEC 61076-2-101
Number of contacts	5
Contacts	Bronze, CuSn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector seal	O-ring, Plastic, FKM/FPM
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.4 1.8 Nm (note max. torque of mating connector!)
Mounting orientation	Rear mount
Panel seal	O-ring, NBR
Mounting thread	PG9
Locknut	Brass, CuZn, Nickel-plated
Receptacle mounting torque	2.56.8 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP68
	NEMA: 1, 3, 4, 6P
Total number of conductors	5
Length (L)	5 m
Conductor material	TC (tinned copper)
Conductor insulation material	PVC

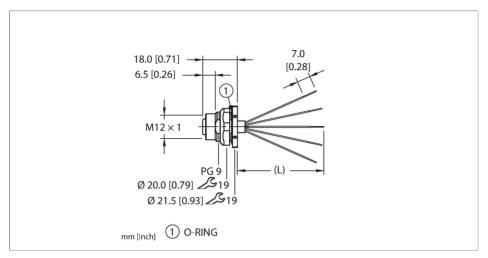

Features













■M12, Female, Receptacle, 5-pin ■ Mounting thread: PG9

Contact assignment

Connector A



Circuit Diagram


1	BN
2)	WH
2)	BU
	BK
4)	GY
5)	




Technical data

Conductor size	22 AWG [Similar to 0.34 mm ²]	
Conductor colors	BN, WH, BU, BK, GY	
Electrical properties at +20 °C		
Rated voltage	250 V	
Current	4 A	
Mechanical and chemical properties		
Ambient temperature range (static)	-40+105 °C	
Approvals	UL 2238 CSA C22.2 No. 182.3 CE UKCA RoHS	
Note		
	- We reserve the right to make technical alterations without prior notice.	


Mounting hole - Through



Mounting hole - Threaded



Rear-mounted





Accessories

FK(S)FD-TOOL

A2550



Tool, knockout hole punch, receptaclemounting hole. Accommodates PG9 threads.



DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1)

100008955



Accessories

LOCKNUT-PG9-BRASS-(10/BAG)

100016624



Locknut, PG9, Brass, Nickel-plated, 10