


Industrial Sensor Cable
TPE-Kabelmantel
RSM RKM 36-2M/S1587

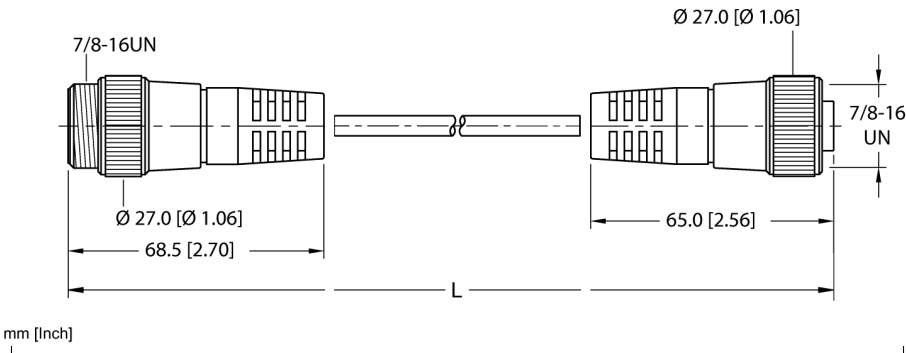

Type	RSM RKM 36-2M/S1587
ID	U-16928

Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	3
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Protection class (When coupled)	IP67, IP68, IP69, IP69K
Mechanical life	> 100 Mating cycles
Pollution degree	3


Connector B	Female, 7/8"-16 UN, Straight
Number of contacts	3
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Protection class (When coupled)	IP67, IP68, IP69, IP69K
Mechanical life	> 100 Mating cycles
Pollution degree	3

Cable diameter	Ø 10.01 mm
Length (L)	2 m
Cable jacket	TPE, Yellow
Conductor insulation material	TPE
Conductor colors	GNYE, BK, WH
Conductor size	3
Number of strands x O.D.	65

Voltage	600 V
Current	10 A



- 7/8" male connector, straight, 3-pin
- 7/8" female connector, straight, 3-pin
- Jacket material: TPE
- Jacket color: yellow
- Protection class: IP67, IP68, IP69, IP69K
- 7/8" Male, Straight, 3-pin
- 7/8" Female, straight, 3-pin
- Flexible Service Cable
- Yellow TPE jacket, 3X16 AWG
- Sunlight Resistant
- -50 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1100, CSA FT2

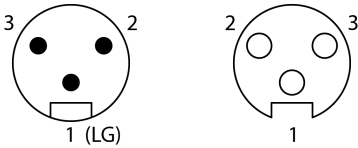

Circuit Diagram

