



# PKG 3M-1.1-RS 4T

## Actuator and Sensor Cable – Extension Cable

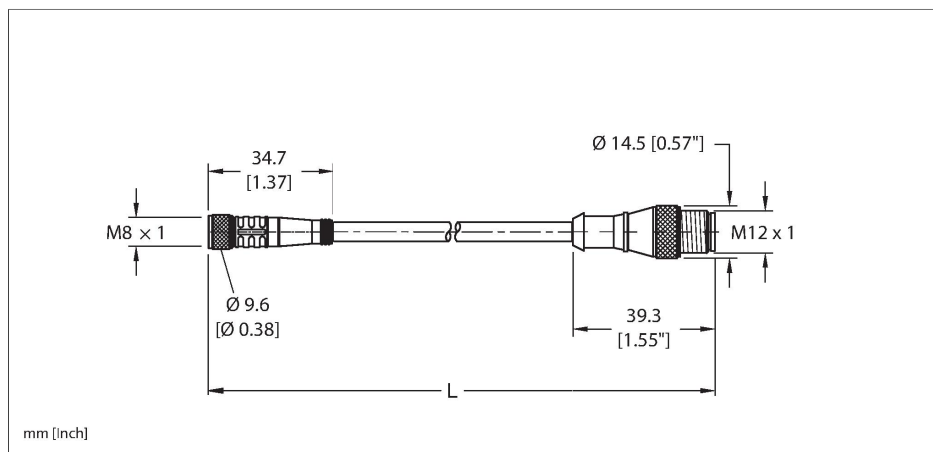


### Technische Daten

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Type                            | PKG 3M-1.1-RS 4T                                          |
| ID                              | U-86706                                                   |
| Connector A                     | Female, M8 × 1, Straight                                  |
| Design specification            | Acc. to IEC 61076-2-104                                   |
| Number of contacts              | 3                                                         |
| Contacts                        | Brass, CuZn, Gold-plated                                  |
| Contact carriers                | Plastic, Nylon or TPU, Black                              |
| Connector body                  | Plastic, TPU, Yellow                                      |
| Coupling nut                    | Brass, CuZn, Nickel-plated                                |
| Connector seal                  | O-ring, Plastic, FKM/FPM                                  |
| Tightening torque (range)       | 0.4 ... 0.8 Nm<br>(note max. torque of mating connector!) |
| Mechanical life                 | > 100 Mating cycles                                       |
| Pollution degree                | 3                                                         |
| Protection class (When coupled) | IP67                                                      |
|                                 | NEMA: 1, 3, 4, 6P                                         |
| Connector B                     | Male, M12 × 1, Straight, A-code                           |
| Design specification            | Acc. to IEC 61076-2-101                                   |
| Number of contacts              | 4                                                         |
| Contacts                        | Brass, CuZn, Gold-plated                                  |
| Contact carriers                | Plastic, TPU, Black                                       |
| Connector body                  | Plastic, TPU, Yellow                                      |
| Coupling nut                    | Brass, CuZn, Nickel-plated                                |
| Tightening torque               | 0.8 ... 1 Nm<br>(note max. torque of mating connector!)   |

### Features

- 
- IP67**  
DEGREE OF PROTECTION
- M8, Female, Straight, 3-pin
- Threaded connector
- M12, Male, Straight, 3-pin
- General Purpose Cable
- Yellow PVC jacket, 3X24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1
- Flexlife® and C-Track Approved

### Cable cross section

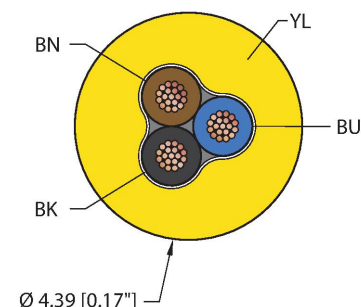

### Contact assignment

## Technische Daten

|                                 |                     |
|---------------------------------|---------------------|
| Mechanical life                 | > 100 Mating cycles |
| Pollution degree                | 3                   |
| Protection class (When coupled) | IP68, IP69K         |
|                                 | NEMA: 1, 3, 4, 6P   |

| Cable data                    |                                  |
|-------------------------------|----------------------------------|
| Cable ID                      | RF50642                          |
| Total number of conductors    | 3                                |
| Cable diameter                | Ø 4.39 mm                        |
| Length (L)                    | 1.1 m                            |
| Cable jacket                  | PVC, Yellow                      |
| Conductor diameter            | 0.044 "                          |
| Conductor material            | TC (tinned copper)               |
| Conductor insulation material | PVC                              |
| Conductor size                | 3 x 24 AWG [Similar to 0.25 mm²] |
| Number of strands x O.D.      | 19 x 36 AWG                      |
| Conductor colors              | BN, BU, BK                       |

| Electrical properties at +20 °C |            |
|---------------------------------|------------|
| Rated voltage                   | 250 VAC/DC |
| Current                         | 4 A        |

| Mechanical and chemical properties |                   |
|------------------------------------|-------------------|
| Bending radius (static)            | ≥ 5 x Ø           |
| Bending radius (dynamic)           | ≥ 10 x Ø          |
| UL cold bend rating                | -40 °C            |
| Flex rating 20 x Ø                 | 10 million cycles |

\*When properly installed @ 20°C, 50%RH, and a cycle speed of ≤0.5 cycles per second.

|                                     |               |
|-------------------------------------|---------------|
| C-Track                             | Yes           |
| Ambient temperature range (static)  | -40...+105 °C |
| Ambient temperature range (dynamic) | 5...+105 °C   |
| Temperature range (installation)    | -10...+105 °C |


| Approval  |                               |
|-----------|-------------------------------|
| Approvals | UL 2238<br>CE<br>UKCA<br>RoHS |

| Note |                                                                                                                         |
|------|-------------------------------------------------------------------------------------------------------------------------|
|      | - Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated |


Connector A



Connector B



## Circuit Diagram



Technische Daten

cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

Montagezubehör

TORQUE-WRENCH-SET-M12-LEGACY

A900153




Adjustable torque driver to connect to a Ø15mm knurl. Compatible with the redesigned and legacy M12 cordsets. Includes (1) adjustable torque driver, (1) adjustment tool, (1) 1/4"square to 4mm hex adaptor bit, and (1) Ø15mm spring loaded clamp bit

Montagezubehör

M8-CORDSETS-MOUNTING-CLIP-(10/BAG)

200005995



10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.