


# RSCD RSCD 440RD-12M

## Industrial Ethernet Cable – Extension Cable

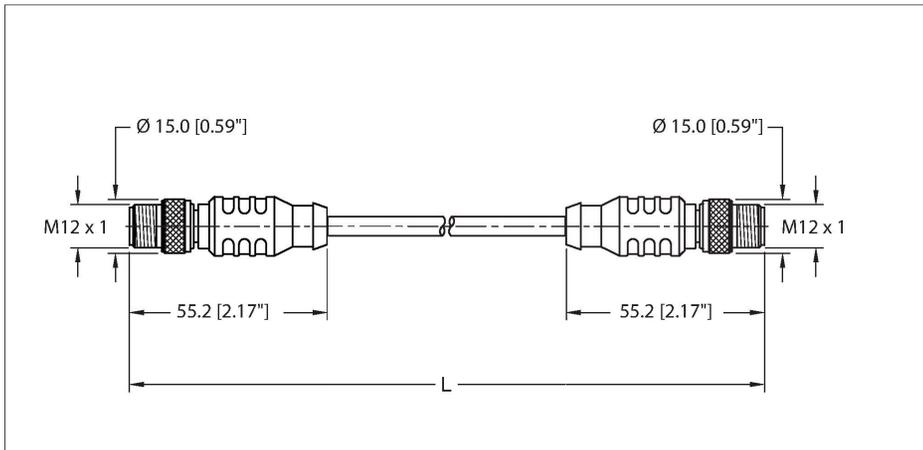

### Technical data


|                                 |   |
|---------------------------------|---|
| Type                            | RSCD RSCD 440RD-12M                                     |
| ID                              | U-96047   |
| Connector A                     | Male, M12 × 1, Straight, D-code                         |
| Number of contacts              | 4   |
| Contacts                        | Brass, CuZn, Gold-plated                                |
| Contact carriers                | Plastic, TPU, Black                                     |
| Connector body                  | Plastic, TPU, Red                                       |
| Coupling nut                    | Brass, CuZn, Nickel-plated                              |
| Tightening torque (range)       | 0.8 ... 1 Nm<br>(note max. torque of mating connector!) |
| Mechanical life                 | > 100 Mating cycles                                     |
| Pollution degree                | 3   |
| Protection class (When coupled) | IP67, IP68, IP69, IP69K<br>NEMA: 1, 3, 4, 6P, 12        |
| Connector B                     | Male, M12 × 1, Straight, D-code                         |
| Design specification            | Acc. to IEC 61076-2-101                                 |
| Number of contacts              | 4   |
| Contacts                        | Bronze, CuSn, Gold-plated                               |
| Contact carriers                | Plastic, Nylon or TPU, Black                            |
| Connector body                  | Plastic, TPU, Red                                       |
| Coupling nut                    | Brass, CuZn, Nickel-plated                              |
| Tightening torque               | 0.8 ... 1 Nm<br>(note max. torque of mating connector!) |
| Mechanical life                 | > 100 Mating cycles                                     |
| Pollution degree                | 3   |

### Features



- M12, Male, Straight, 4-pin
- D-code
- M12, Male, Straight, 4-pin
- D-code
- Unshielded Twisted Pair
- Industrial Ethernet Cable
- fieldbus type: Ethernet CAT5E, Red TPE jacket, 2UTPX24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL 1685, UL1061
- Flexlife® and C-Track Approved

### Cable cross section


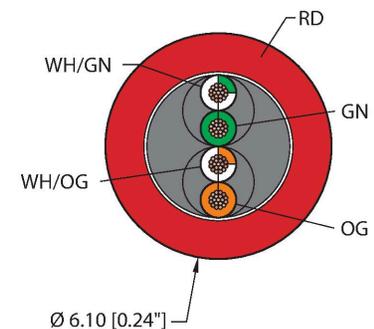


### Contact assignment

## Technical data

Connector A

Connector B



|   |   |
|---|---|
| Protection class (When coupled)           | IP65, IP67, IP68, IP69<br>NEMA: 1, 3, 4, 6P, 12 |
| <b>Cable data</b>                         |   |
| Cable ID                                  | RF52115   |
| Fieldbus                                  | Ethernet, 440                                   |
| Total number of conductors                | 4   |
| Cable diameter                            | Ø 6.1 mm  |
| Length (L)                                | 12 m  |
| Cable jacket                              | TPE, Red  |
| Conductor material                        | TC (tinned copper)                              |
| Conductor colors                          | WH/GN, GN, WH/OG, OG                            |
| Description of assembly                   | UTP (Unshielded Twisted Pair)                   |
| Number of pairs                           | 2   |
| Conductor diameter                        | 0.042 "   |
| Conductor insulation material             | HDPE  |
| Cable conductor cross-section             | 2x24 AWG [Similar to 0.25 mm <sup>2</sup> ]     |
| Number of strands x O.D.                  | 7x32 AWG  |
| <b>Electrical properties at +20 °C</b>    |   |
| Rated voltage                             | 48 V(UL 1863)                                   |
| Current                                   | 4 A   |
| <b>Mechanical and chemical properties</b> |   |
| Bending radius (static)                   | ≥ 4 x Ø   |
| Bending radius (dynamic)                  | ≥ 10 x Ø  |
| Bending radius (C-track)                  | ≥ 4 In.   |
| Bending cycles (C-track)                  | 35 Million *                                    |
| Torsional stress                          | ± 270 °/m                                       |
| Torsion rating                            | Max. 3 million                                  |
| Torsional stress                          | 52 Cycles/min                                   |
| UL cold bend rating                       | -40 °C  |
| C-Track                                   | Yes   |
| Ambient temperature range (static)        | -40...+80 °C                                    |
| Ambient temperature range (dynamic)       | 5...+80 °C                                      |
| Temperature range (installation)          | -10...+80 °C                                    |
| <b>Approval</b>                           |   |
| Approvals                                 | UL 1863<br>CE<br>UKCA<br>RoHS                   |

## Technical data

### Note


- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

## Accessories

### M12-CORDSETS-MOUNTING-CLIP-(10/BAG)

100016882

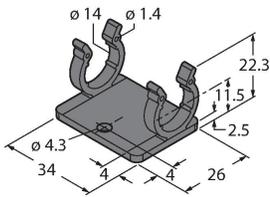

10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.