



Bus termination resistor

RKM 57-TR2

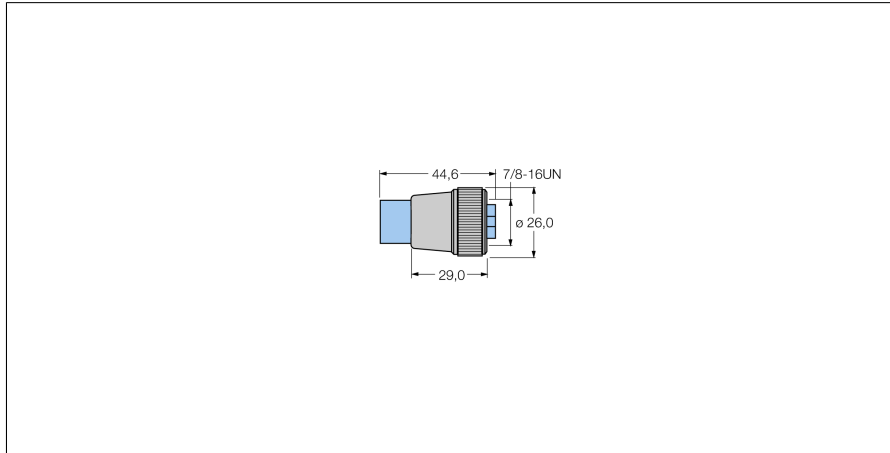

Type	RKM 57-TR2
ID	U0102-1
Connector A	Female, 7/8"-16 UN, Straight
Number of contacts	5
Contact carriers	Plastic, TPU, Blue
Connector body	Plastic, TPU, Blue
Coupling nut	Brass, CuZn, Nickel-plated
Protection class (When coupled)	IP67, (screwed together) NEMA: 1, 3, 4, 6P
Fieldbus	DeviceNet
Rated voltage	300VDC(7.6VDC MAX ON PINS WITH RESISTOR)V
Mechanical and chemical properties	
Ambient temperature range (static)	-40°C...+80°C

- Type: 7/8" female connector, 5-pin
- For use in CAN (DeviceNet™, CANopen) applications
- Rated voltage: 300 VDC (max. 7.6 VDC on pins with resistor)
- Internal resistor 120 Ω, 1/2 W
- Protection class: NEMA 1, 3, 4, 6P and IEC IP67
- Temperature range: -40 °C...+80 °C



Circuit Diagram

