


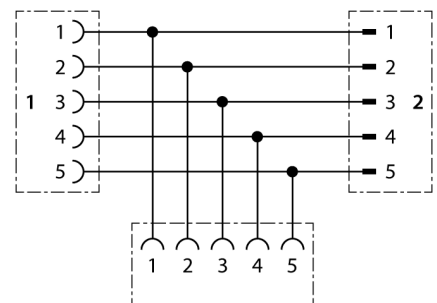




# 2-Way Splitter RSM FKM RKM 57



- 7/8" minifast
- M12 eurofast
- T-splitter, 5-pin
- For use in CAN (DeviceNet™, CANopen) applications



Type	RSM FKM RKM 57
ID	U0142
Distributed I/O	T-splitter, 2-port
Number of contacts	5
Connector body	Plastic
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, Only in screwed condition
Contact carriers	Plastic
Connector body	Plastic
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, Only when plugged
Fieldbus	DeviceNet
Electrical properties at +20 °C	
Rated voltage	250VV
Current	4AA
Insulation resistance	≥ 10 <sup>9</sup> Ω
forward resistance	≤ 5 mΩ
Mechanical and chemical properties	
Ambient temperature range (dynamic)	-40°C...+75°C
Note	- We reserve the right to make technical alterations without prior notice.

F061  
F098  
F065  
F060

