



# RK 4.4T-21-RS 4.4T

## Actuator and Sensor Cable – Extension Cable

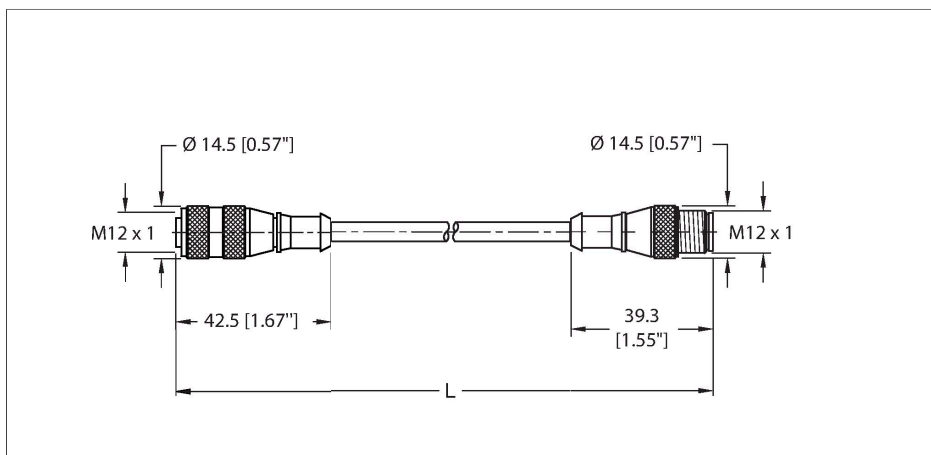


### Technische Daten

|                                 |                                                         |
|---------------------------------|---------------------------------------------------------|
| Type                            | RK 4.4T-21-RS 4.4T                                      |
| ID                              | U0907-03                                                |
| Connector A                     | Female, M12 × 1, Straight, A-code                       |
| Design specification            | Acc. to IEC 61076-2-101                                 |
| Number of contacts              | 4                                                       |
| Contacts                        | Brass, CuZn, Gold-plated                                |
| Contact carriers                | Plastic, Nylon or TPU, Black                            |
| Connector body                  | Plastic, TPU, Yellow                                    |
| Coupling nut                    | Brass, CuZn, Nickel-plated                              |
| Connector seal                  | O-ring, Plastic, FKM/FPM                                |
| Tightening torque (range)       | 0.8 ... 1 Nm<br>(note max. torque of mating connector!) |
| Mechanical life                 | > 100 Mating cycles                                     |
| Pollution degree                | 3                                                       |
| Protection class (When coupled) | IP68, IP69K                                             |
|                                 | NEMA: 1, 3, 4, 6P                                       |
| Connector B                     | Male, M12 × 1, Straight, A-code                         |
| Design specification            | Acc. to IEC 61076-2-101                                 |
| Number of contacts              | 4                                                       |
| Contacts                        | Brass, CuZn, Gold-plated                                |
| Contact carriers                | Plastic, Nylon or TPU, Black                            |
| Connector body                  | Plastic, TPU, Yellow                                    |
| Coupling nut                    | Brass, CuZn, Nickel-plated                              |
| Tightening torque               | 0.8 ... 1 Nm<br>(note max. torque of mating connector!) |

### Features

- UL US
- SP US
- CE
- UK CA
- RoHS compliant
- IP68/ IP69K
- DEGREE OF PROTECTION
- M12, Female, Straight, 4-pin
- M12, Male, Straight, 4-pin
- Instrumentation Tray Cable
- Gray PVC jacket, 4X22 AWG
- Sunlight Resistant
- 40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- Flexlife® and C-Track Approved

### Cable cross section

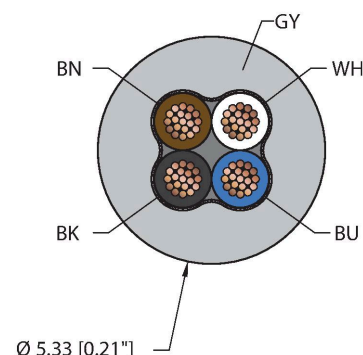

### Contact assignment

## Technische Daten

|                                 |                     |
|---------------------------------|---------------------|
| Mechanical life                 | > 100 Mating cycles |
| Pollution degree                | 3                   |
| Protection class (When coupled) | IP68, IP69K         |
|                                 | NEMA: 1, 3, 4, 6P   |

| Cable data                    |                                                          |
|-------------------------------|----------------------------------------------------------|
| Cable ID                      | RF50516                                                  |
| Total number of conductors    | 4                                                        |
| Cable diameter                | Ø 5.33 mm                                                |
| Length (L)                    | 21 m, (+50mm or 4% of length/-0.0, Whichever is greater) |
| Cable jacket                  | PVC, Gray                                                |
| Conductor diameter            | 0.054 "                                                  |
| Conductor material            | TC (tinned copper)                                       |
| Conductor insulation material | PVC                                                      |
| Conductor size                | 4 x 22 AWG [Similar to 0.34 mm²]                         |
| Number of strands x O.D.      | 19 x 0.0058 "                                            |
| Conductor colors              | BN, WH, BU, BK                                           |

| Electrical properties at +20 °C |       |
|---------------------------------|-------|
| Rated voltage                   | 250 V |
| Current                         | 4 A   |


| Mechanical and chemical properties |                   |
|------------------------------------|-------------------|
| Bending radius (static)            | ≥ 5 x Ø           |
| Bending radius (dynamic)           | ≥ 10 x Ø          |
| UL cold bend rating                | -40 °C            |
| Flex rating 20 x Ø                 | 10 million cycles |

|                                     |                                                                                      |
|-------------------------------------|--------------------------------------------------------------------------------------|
|                                     | *When properly installed @ 20°C, 50%RH, and a cycle speed of ≤0.5 cycles per second. |
| C-Track                             | Yes                                                                                  |
| Ambient temperature range (static)  | -40...+105 °C                                                                        |
| Ambient temperature range (dynamic) | 5...+105 °C                                                                          |
| Temperature range (installation)    | -10...+105 °C                                                                        |


| Approval  |                                                      |
|-----------|------------------------------------------------------|
| Approvals | UL 2238<br>CSA C22.2 No. 182.3<br>CE<br>UKCA<br>RoHS |

| Note |                                                                                 |
|------|---------------------------------------------------------------------------------|
|      | - Flex ratings may be reduced if used in extreme temperatures, exposure to cer- |

Connector A



Connector B



## Circuit Diagram



Technische Daten


tain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

Montagezubehör

BS 8141-0


U6550



Field-wireable male connector, M12 x 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

TORQUE-WRENCH-SET-M12-LEGACY


A900153



Adjustable torque driver to connect to a Ø15mm knurl. Compatible with the redesigned and legacy M12 cordsets. Includes (1) adjustable torque driver, (1) adjustment tool, (1) 1/4"square to 4mm hex adaptor bit, and (1) Ø15mm spring loaded clamp bit

B 8141-0

U6545




Field-wireable female connector, M12 x 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, plastic coupling nut

Montagezubehör

M12-CORDSETS-MOUNTING-CLIP-(10/BAG)

100016882



10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.