



MFS 6F-0.5

Actuator and Sensor Receptacle – Rear Mount

Threaded or Snap Connection

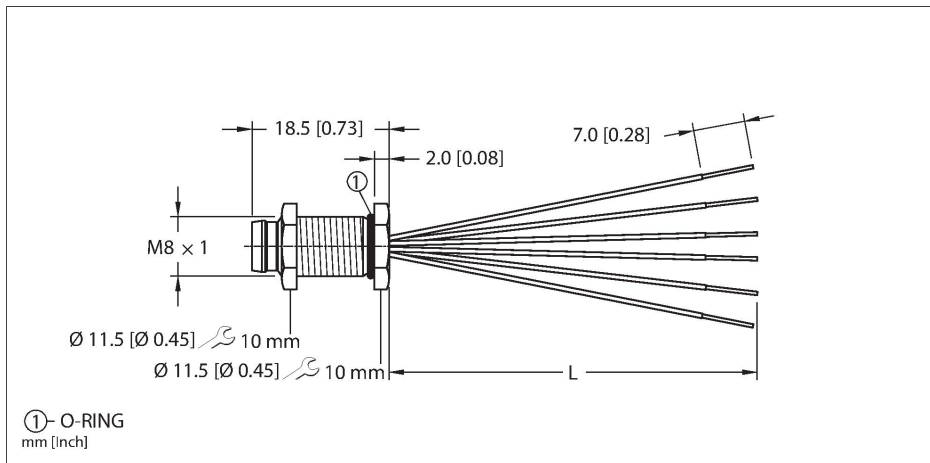

Technische Daten

Type	MFS 6F-0.5
ID	U0925-93
Connector A	Male, M8 x 1
Design specification	Acc. to IEC 61076-2-104
Number of contacts	6
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.4 ... 0.8 Nm (note max. torque of mating connector!)
Mounting orientation	Rear mount
Panel seal	O-ring, Plastic, NBR
Mounting thread	M8 x 1
Locknut	Brass, CuZn, Nickel-plated
Receptacle mounting torque	1.4 ... 6.8 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
	NEMA: 1, 3, 4, 6P
Cable data	
Conductor data	
Total number of conductors	6

Features



- Male M8 picofast Receptacle
- M8, Male, 6-pin
- Mounting thread: M8 x 1

Contact assignment

Connector A




Circuit Diagram

1	BN
2	WH
3	BU
4	BK
5	GY
6	PK


Technische Daten

Length (L)	0.5 m, 0.5 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	6 x 24 AWG [Similar to 0.25 mm ²]
Conductor colors	BN, WH, BU, BK, GY, PK
Electrical properties at +20 °C	
Rated voltage	125 VAC/DC
Current	2 A
Mechanical and chemical properties	
Ambient temperature range (static)	-30...+105 °C
Approvals	CSA C22.2 No. 182.3 CE RoHS UL Listed
Note	
- We reserve the right to make technical alterations without prior notice.	

Mounting hole - Through

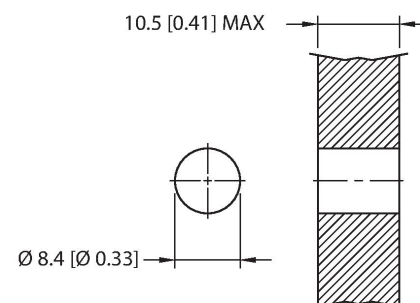

Mounting hole - Threaded



Rear-mounted

