


# RSM RKM 106-15M/S1587


## Actuator and Sensor Cable – Extension Cable

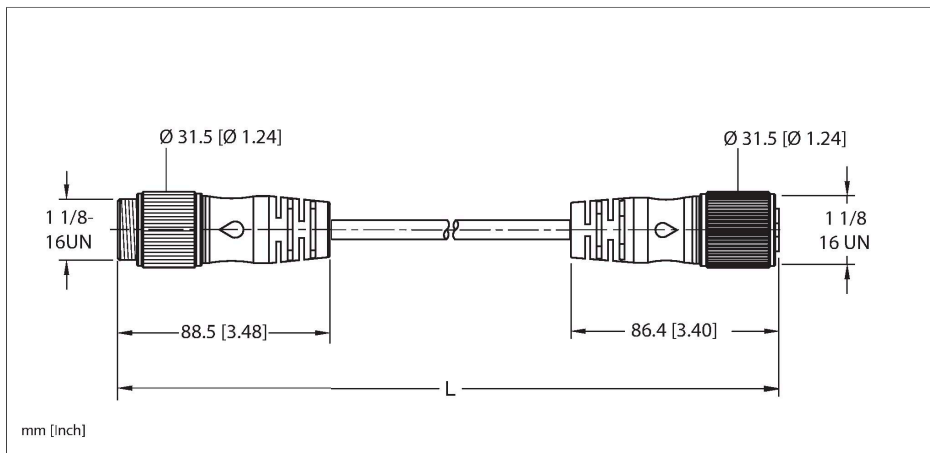


### Features

- 1-1/8" Male, Straight, 10-pin
- 1-1/8" Female, Straight, 10-pin
- Instrumentation Tray Cable
- Yellow TPE jacket, 10X16 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4

### Cable cross section

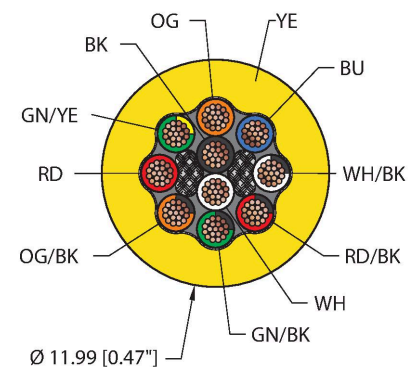

### Contact assignment

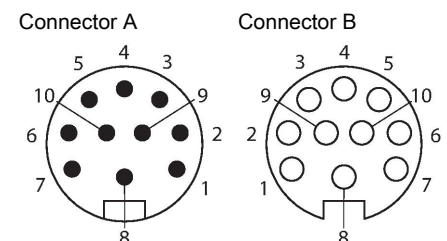

### Technische Daten

|                                 |                                |
|---------------------------------|--------------------------------|
| Type                            | RSM RKM 106-15M/S1587          |
| ID                              | U2-00526                       |
| Connector A                     | Male, 1 1/8"-16 UN, Straight   |
| Number of contacts              | 10                             |
| Contacts                        | Brass, CuZn, Gold-plated       |
| Contact carriers                | Plastic, TPU, Yellow           |
| Connector body                  | Plastic, TPU, Yellow           |
| Coupling nut                    | Brass, CuZn, Nickel-plated     |
| Tightening torque               | 3 Nm                           |
| Mechanical life                 | > 100 Mating cycles            |
| Pollution degree                | 3                              |
| Protection class (When coupled) | IP67, IP68, IP69, IP69K        |
|                                 | NEMA: 1, 3, 4, 6P, 12          |
| Connector B                     | Female, 1 1/8"-16 UN, Straight |
| Number of contacts              | 10                             |
| Contacts                        | Brass, CuZn, Gold-plated       |
| Contact carriers                | Plastic, TPU, Yellow           |
| Connector body                  | Plastic, TPU, Yellow           |
| Coupling nut                    | Brass, CuZn, Nickel-plated     |
| Protection class (When coupled) | IP67, IP68, IP69, IP69K        |
|                                 | NEMA: 1, 3, 4, 6P, 12          |
| Cable data                      |                                |
| Cable ID                        | RF51015                        |
| Total number of conductors      | 10                             |

## Technische Daten

|                                                                                                                                                                                                                                                                               |                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Cable diameter                                                                                                                                                                                                                                                                | Ø 11.99 mm                                               |
| Length (L)                                                                                                                                                                                                                                                                    | 15 m, (+50mm or 4% of length/-0.0, Whichever is greater) |
| Cable jacket                                                                                                                                                                                                                                                                  | TPE, Yellow                                              |
| Conductor diameter                                                                                                                                                                                                                                                            | 0.088 "                                                  |
| Conductor material                                                                                                                                                                                                                                                            | TC (tinned copper)                                       |
| Conductor insulation material                                                                                                                                                                                                                                                 | PVC                                                      |
| Conductor size                                                                                                                                                                                                                                                                | 10 x 16 AWG [Similar to 1.50 mm²]                        |
| Number of strands x O.D.                                                                                                                                                                                                                                                      | 19 x 0.0117 "                                            |
| Conductor colors                                                                                                                                                                                                                                                              | OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, RD, GN/YE, BK, WH    |
| <b>Electrical properties at +20 °C</b>                                                                                                                                                                                                                                        |                                                          |
| Rated voltage                                                                                                                                                                                                                                                                 | 600 V                                                    |
| Current                                                                                                                                                                                                                                                                       | 7 A                                                      |
| <b>Mechanical and chemical properties</b>                                                                                                                                                                                                                                     |                                                          |
| Bending radius (static)                                                                                                                                                                                                                                                       | ≥ 5 x Ø                                                  |
| Bending radius (dynamic)                                                                                                                                                                                                                                                      | ≥ 10 x Ø                                                 |
| UL cold bend rating                                                                                                                                                                                                                                                           | -40 °C                                                   |
| Ambient temperature range (static)                                                                                                                                                                                                                                            | -40...+105 °C                                            |
| Ambient temperature range (dynamic)                                                                                                                                                                                                                                           | 5...+105 °C                                              |
| Temperature range (installation)                                                                                                                                                                                                                                              | -10...+105 °C                                            |
| <b>Approval</b>                                                                                                                                                                                                                                                               |                                                          |
| Approvals                                                                                                                                                                                                                                                                     | UL 2238<br>CE<br>RoHS                                    |
| <b>Note</b>                                                                                                                                                                                                                                                                   |                                                          |
| <p>- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.</p> <p>- We reserve the right to make technical alterations without prior notice.</p> |                                                          |

## Circuit Diagram

