



# PKGS 4M-4/S90

## Actuator and Sensor Cable – Connection Cable

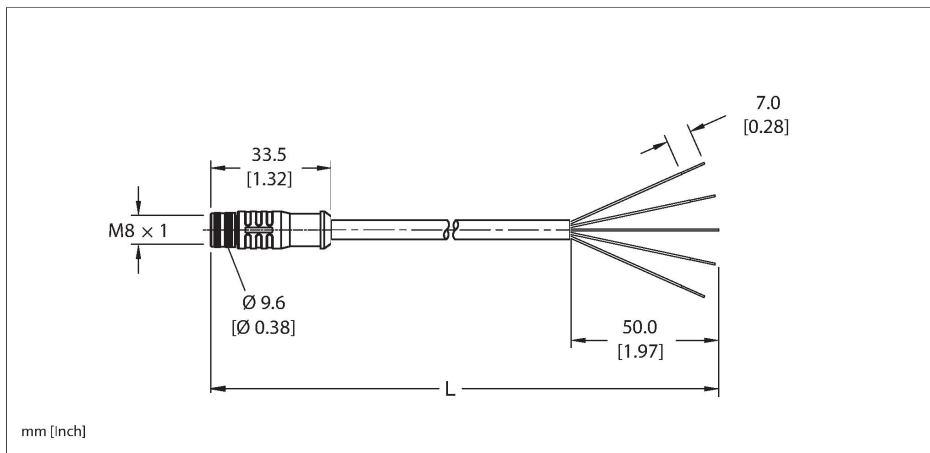

### Technische Daten


|                                 |                                                                                                |
|---------------------------------|------------------------------------------------------------------------------------------------|
| Type                            | PKGS 4M-4/S90                                                                                  |
| ID                              | U2-10906                                                                                       |
| Connector A                     | Female, M8 × 1, Straight                                                                       |
| Design specification            | Acc. to IEC 61076-2-104                                                                        |
| Number of contacts              | 4                                                                                              |
| Contacts                        | Brass, CuZn, Gold-plated                                                                       |
| Contact carriers                | Plastic, Nylon or TPU, Black                                                                   |
| Connector body                  | Plastic, TPU, Yellow                                                                           |
| Coupling nut                    | Brass, CuZn, Nickel-plated                                                                     |
| Connector seal                  | O-ring, Plastic, FKM/FPM                                                                       |
| Tightening torque (range)       | 0.4 ... 0.8 Nm<br>(note max. torque of mating connector!)                                      |
| Mechanical life                 | > 100 Mating cycles                                                                            |
| Pollution degree                | 3                                                                                              |
| Protection class (When coupled) | IP67                                                                                           |
| <b>Cable data</b>               |                                                                                                |
| Cable ID                        | RF51425                                                                                        |
| Total number of conductors      | 4                                                                                              |
| Cable diameter                  | Ø 5.13 mm                                                                                      |
| Length (L)                      | 4 m, (+50mm or 4% of length/-0.0, Whichever is greater)                                        |
| Cable jacket                    | TPU, Black                                                                                     |
| Shielding                       | Aluminum/polyester (OUT), 38 AWG, TC (Tinned Copper), 65% coverage, 26 AWG, TC (Tinned Copper) |
| Conductor diameter              | 0.045 "                                                                                        |

### Features



- M8, Female, Straight, 4-pin
- Threaded Connector
- Shielded to coupling nut
- General Purpose Cable
- Black TPU jacket, shielded, 4X26 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1

### Cable cross section

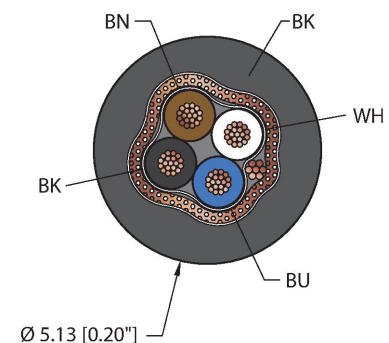

### Contact assignment

Technische Daten


|                                     |                                                      |
|-------------------------------------|------------------------------------------------------|
| Conductor material                  | TC (tinned copper)                                   |
| Conductor insulation material       | PVC                                                  |
| Conductor size                      | 4 x 26 AWG [Similar to 0.14 mm²]                     |
| Number of strands x O.D.            | 19 x 38 AWG                                          |
| Conductor colors                    | BN, WH, BU, BK                                       |
| Electrical properties at +20 °C     |                                                      |
| Rated voltage                       | 125 VAC/DC                                           |
| Current                             | 2 A                                                  |
| Mechanical and chemical properties  |                                                      |
| Bending radius (static)             | ≥ 5 x Ø                                              |
| Bending radius (dynamic)            | ≥ 15 x Ø                                             |
| UL cold bend rating                 | -40 °C                                               |
| Ambient temperature range (static)  | -40...+90 °C                                         |
| Ambient temperature range (dynamic) | 5...+90 °C                                           |
| Temperature range (installation)    | -10...+90 °C                                         |
| Approval                            |                                                      |
| Approvals                           | UL 2238<br>CSA C22.2 No. 182.3<br>CE<br>UKCA<br>RoHS |

|                                                                                                                                                                                      |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Note                                                                                                                                                                                 |  |
| - Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius. |  |
| - We reserve the right to make technical alterations without prior notice.                                                                                                           |  |

Connector A



Circuit Diagram



Montagezubehör

**M8-CORDSETS-MOUNTING-CLIP-(10/BAG)**

**200005995**

10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.