



Passive Actuator/Sensor Junction Box, 4 Ports

7/8" minifast I/O Ports

4 RKF 30-B1161/CS11868

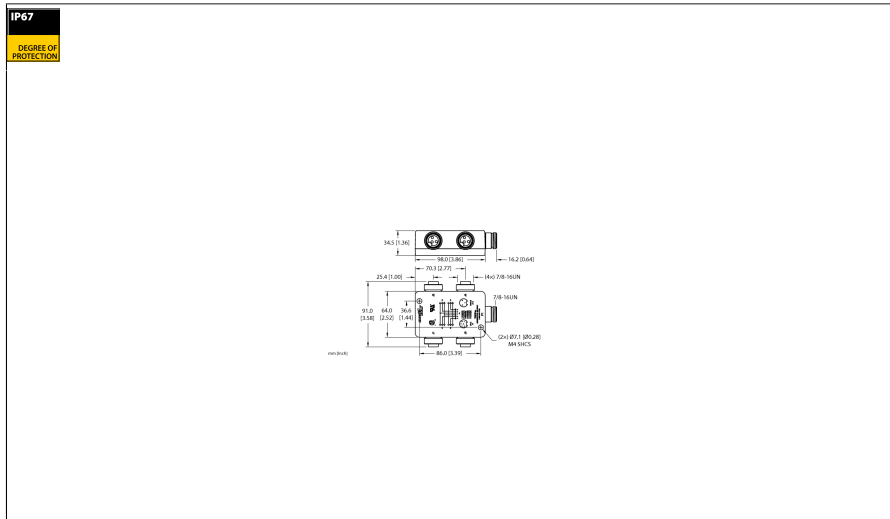

- 7/8" minifast Junction Box
- 4 ports
- Side exit 7/8" minifast home run connector
- Aluminum housing
- I/O port: 3-pin

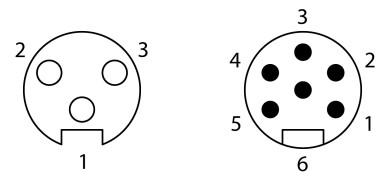

Type	4 RKF 30-B1161/CS11868
ID	U2-13595
Distributed I/O	Junction box, 4-port, with integral 7/8" homerun connector
Housing	Aluminum, Powder coating, Black
I/O Port	Female, 7/8"
Number of contacts	3
Contact carriers	Plastic, TPU, Black
Housing material/finish	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67
Homerun connector	Male, 7/8", Side exit
Number of contacts	6
Contact carriers	Plastic, TPU, Black
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque	4 Nm
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67
Electrical properties at +20 °C	
Rated voltage	250V _{AC} /300V _{DC}
Current	4 A per port, total current 9 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40°C...+90°C
Note	- We reserve the right to make technical alterations without prior notice.