


# CA-2/RKF 40/S651

## Actuator and Sensor Accessory – Conduit adapter

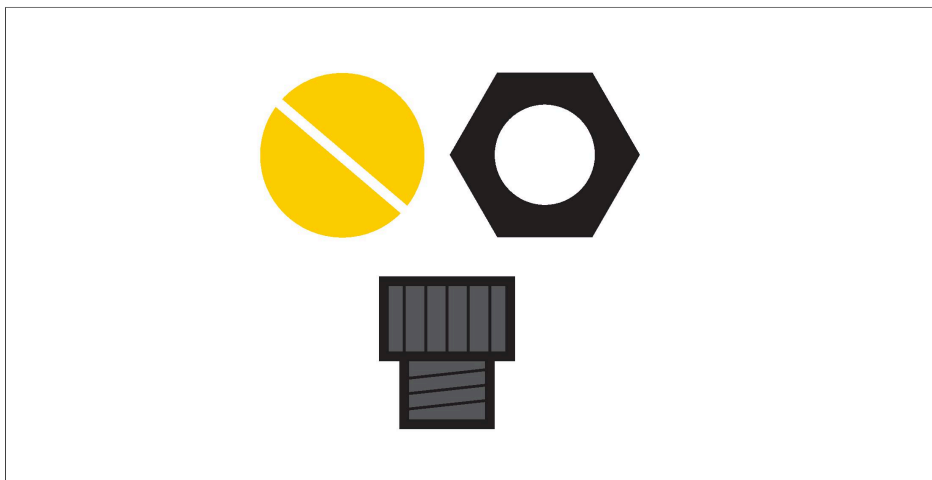

### Features

- Female 7/8" minifast Conduit adaptor

### Technische Daten

Type	CA-2/RKF 40/S651
ID	U2-17231
Housing	Plastic, PA66-GF33, Black
Connector A	Female, 7/8"-16 UN, Straight
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Protection class (When coupled)	IP67, Only when screwed or plugged together
Connector B	Female, 7/8"-16 UN, Straight
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Protection class (When coupled)	IP67, Only when plugged
<b>Cable data</b>	
Rated voltage	250 V
Current	9 A
Ambient temperature range (static)	-30...+80 °C
Ambient temperature range (dynamic)	-30...+80 °C
Approvals	FM Div.2

## Technische Daten

### Note

- We reserve the right to make technical alterations without prior notice.

---