


BS 4161-0 5-13MM

Actuator and Sensor Field Wireable – 7/8" Connection



Features

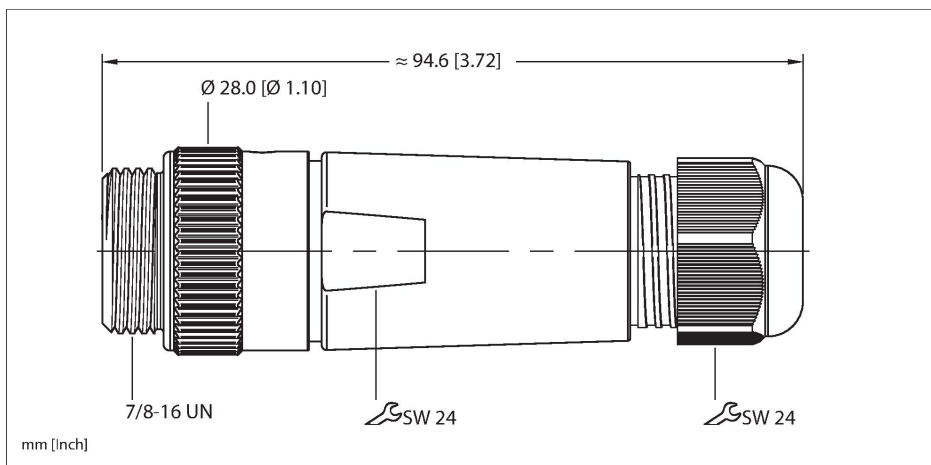

- Screw terminal Wire Termination
- Plastic housing
- 7/8" Male, Straight, 6-pin
- Plastic Housing

Technische Daten

Type	BS 4161-0 5-13MM
ID	U2-18536
Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	6
Contacts	Brass, CuSn, Gold-plated
Contact carriers	Plastic, Nylon or TPU, Black
Connector body	Plastic, PA, Black
Coupling nut	Aluminum, CuZn, Anodized
Acceptable cable diameter	5...13 mm
Core cross-section/terminal capacity	16...22 AWG
Connection mode	Screw/clamp connection
Mechanical life	> 50 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
Electrical properties at +20 °C	
Rated voltage	600 V
Current	8 A
Mechanical and chemical properties	
Ambient temperature range (static)	-25...+85 °C
Approvals	UL Recognized RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	