



# 2-Way Splitter

## Small h body

### XSH-RSM-2RKM 50

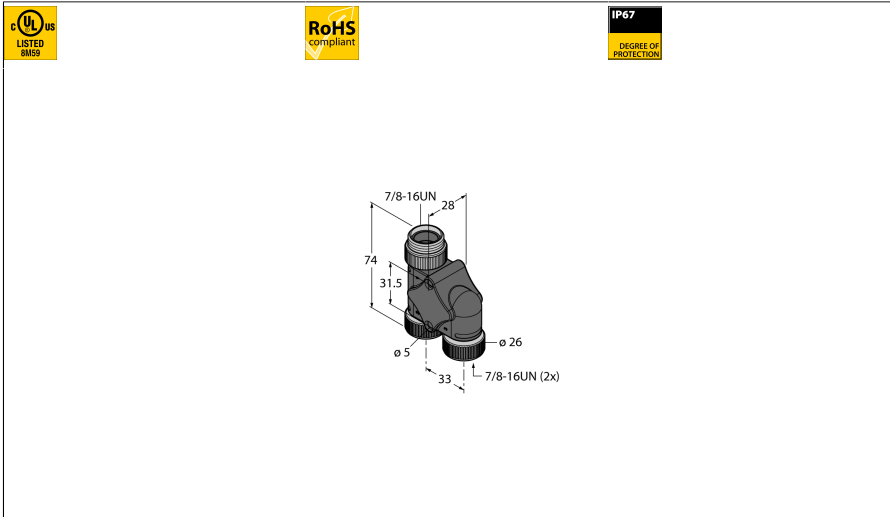

- 7/8" connector
- Male – 2 x female, 5-pin
- Wired in parallel
- cULus listed
- RoHS-compliant
- Protection class: NEMA 1, 3, 4, 6P and IEC IP67



Type	XSH-RSM-2RKM 50
ID	U2-23667
Distributed I/O	h-splitter, 2-port
Housing	Plastic, TPU
Connector A	Male, 7/8"-16 UN
Number of contacts	5
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, Only in screwed condition
Connector B	Female, 7/8"-16 UN
Number of contacts	5
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67
<b>Electrical properties at +20 °C</b>	
Rated voltage	600VV
Current	9AA
<b>Mechanical and chemical properties</b>	
Ambient temperature range (static)	-40°C...+105°C°C
Ambient temperature range (dynamic)	-40°C...+105°C°C
Note	- We reserve the right to make technical alterations without prior notice.

#### Circuit Diagram

