


XSH-RSM-2RKM 40/K1T

Actuator and Sensor Splitter – Small h body




Features




- 7/8" connector
- Male – 2 x female, 4-pin
- The connector coding is rotated by 180° degrees from the standard
- Wired in parallel
- cULus listed
- RoHS-compliant

Contact assignment



Circuit Diagram

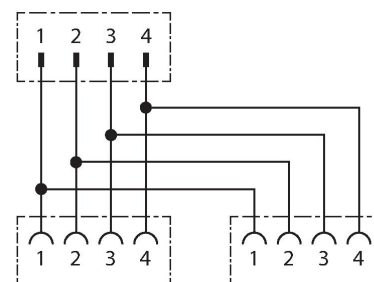

Technische Daten

Type	XSH-RSM-2RKM 40/K1T
ID	U2-23672
Distributed I/O	h-splitter, 2 -port
Housing	Plastic, TPU, Black
Connector A	Male, 7/8"-16 UN
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, When coupled
Connector B	Female, 7/8"-16 UN
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Seal	Plastic
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67
Electrical properties at +20 °C	
Rated voltage	600 V
Current	9 A

Technische Daten

Mechanical and chemical properties

Ambient temperature range (static)	-40...+105 °C
------------------------------------	---------------

Ambient temperature range (dynamic)	-40...+105 °C
-------------------------------------	---------------

Note

- We reserve the right to make technical alterations without prior notice.