


TB-4M8Z-3P2-FS8

Junction Box - Actuator/Sensor, 4-port – Ø 8 mm, I/O Port with M12 Male Connector for the Supply Cable

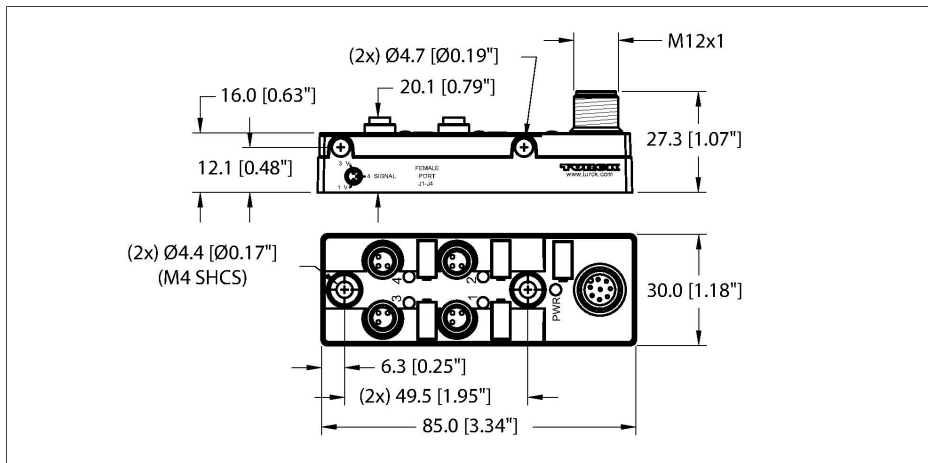

Technical data

Type	TB-4M8Z-3P2-FS8
ID	U2-28308
Distributed I/O	Junction box, 4, with M12 homerun connector
Housing	Plastic, PA 6 GF30, Black
Display operating voltage	LED, green
Display switching state	LED, yellow
Switching function	PNP
I/O Port	Female, Ø 8 mm
Design specification	Acc. to IEC 61076-2-104
Number of contacts	3
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 6 GF15, Black
Connector seal	O-ring, Plastic, FKM/FPM
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
	NEMA: 1, 3, 4, 6P
Homerun connector	Male, M12 × 1, Top exit, A-coded
Design specification	Acc. to IEC 61076-2-101
Number of contacts	8
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 4.6, Black

Features




- Housing material: PA 6 GF30
- Housing color: Black
- Fully encapsulated
- Protection class: IEC: IP67; NEMA: 1, 3, 4, 6P
- CE compliant
- RoHS compliant
- LED (PNP circuit)
- I/O port: 3-pin

Contact assignment

I/O Connector

Homerun connector



TB-4M8Z-3P2-FS8 | 10/24/2022 23-08 | technical changes reserved

Technical data

Tightening torque	0.8 ... 1 Nm (note max. torque of mating connector!)
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K NEMA: 1, 3, 4, 6P
Electrical properties at +20 °C	
Rated voltage	30 VDC
Current	2 A per contact, total current 2 A
Mechanical and chemical properties	
Approvals	CE UKCA RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	

Scope of delivery

Device	Quantity	Description
Junction boxes	1	Passive actuator/sensor junction box
PSGK-MC	2	Closure caps for M8 female connectors
KS5/10	5	Labels

Accessories

Ident-No.	Part Number	Description
U5312-2	RKC 8.6T-5	Connection cordset, female, M12, 8-pin, straight, 5m * (homerun)
U5306-20	WKC 8.6T-5	Connection cordset, female, M12, 8-pin, right-angle, 5m * (homerun)
U0885-26	B 8181-0	Field-wireable, female, M12, 8-pin, straight,(6-8mm)
U0885-25	BS 8181-0	Field-wireable, male, M12, 8-pin, straight,(6-8mm)
A1050	KS 5/10 (10/LABELS)	Labels
U0092-00	PSG 3-2	Cordset, male, Ø 8 mm (snap), 3-pin, straight, 2m * (I/O port)
U0138-2	PSW 3-2	Cordset, male, Ø 8 mm (snap), 3-pin, right-angle, 2m * (I/O port)
U2-11982	PSGK-MC (8/BAG)	Dust cap, male, Ø 8 mm (snap), (8/BAG)
A900154	TORQUE-WRENCH-SET-M12&M8-LEGACY	Torque wrench set, Torque driver, torque setting tool, M12 fitting, M8 fitting.
A900101	PICOBX ADAPTOR PLATE, 4 PORT (1PACK)	Allows new picobox to utilize the previous version mounting hole locations.

* Other lengths available on request

Circuit Diagram

