


TB-4M8Z-4-1

Junction Box - Actuator/Sensor, 4-port – M8 snap, 4 pole I/O port with cable homerun

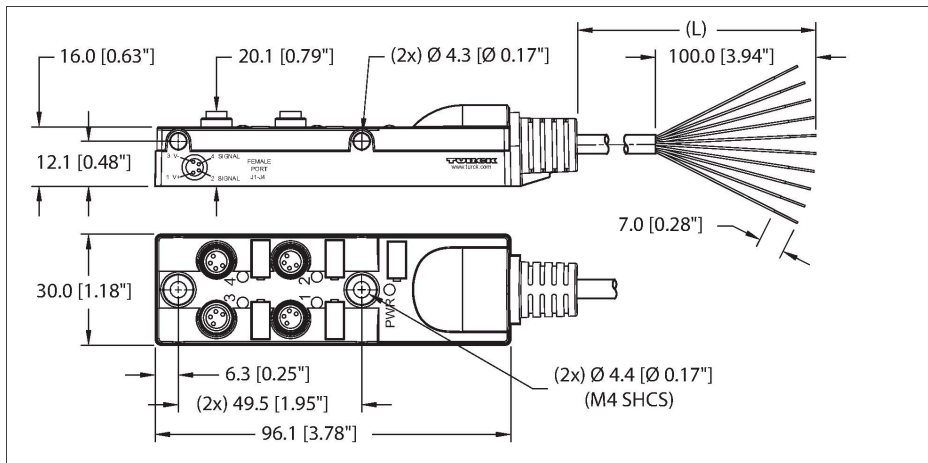

Technical data


Type	TB-4M8Z-4-1
ID	U2-31496
Distributed I/O	Junction box, 4, with integral homerun cable
Housing	Plastic, PA 6 GF30, Black
I/O Port	Female, Ø 8 mm
Design specification	Acc. to IEC 61076-2-104
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 6 GF15, Black
Connector seal	O-ring, Plastic, FKM/FPM
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
	NEMA: 1, 3, 4, 6P
Homerun connector	Cable, Side exit
Cable data	
Cable ID	RF50836
Total number of conductors	10
Cable diameter	Ø 6.6 mm
Length (L)	1 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Cable jacket	PVC, Black

Features



- Housing material: Nylon
- Housing color: Black
- Fully encapsulated
- Protection class: IEC: IP67
- CE compliant
- RoHS compliant
- I/O port: 4-pin
- General Purpose Cable
- Black PVC jacket, shielded, 10X24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1
- Cable length: 1 m

Cable cross section

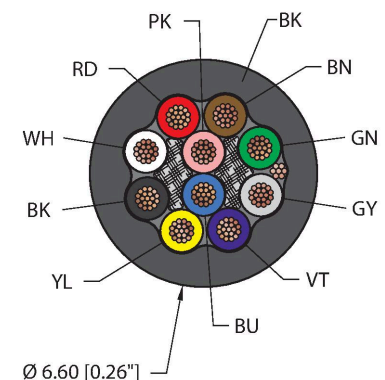

Technical data

Shield	Aluminum/polyester (IN)
Cable drain	26 AWG, TC (Tinned Copper)
Conductor diameter	0.044 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	10 x 24 AWG [Similar to 0.25 mm²]
Number of strands x O.D.	19 x 36 AWG
Conductor colors	BU, PK, BN, GN, GY, VT, YL, BK, WH, RD

Electrical properties at +20 °C

Rated voltage	30 VDC
Rated voltage	DC VDC
Current	2 A per signal contact, total current 6 A

Mechanical and chemical properties

Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+85 °C
Ambient temperature range (dynamic)	5 °C...+85 °C
Temperature range (installation)	-10 °C...+85 °C

Approval

Approvals	CE RoHS
-----------	------------

Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

Contact assignment

I/O Connector



Scope of delivery

Device	Quantity	Description
Junction boxes	1	Passive actuator/sensor junction box
PSGK-MC	2	Closure caps for M8 female connectors
KS5/10	5	Labels

Accessories

Ident-No.	Part Number	Description
U0915-15	BKM 14-836-5	Connection cordset, female, M16, 14-pin, straight, 5m * (homerun)
U2-07158	BK 14-0	Field-wireable, female, M16, 14-pin, straight, (6-8mm)
U2-07157	BS 14-0	Field-wireable, male, M16, 14-pin, straight, (6-8mm)
A1050	KS 5/10 (10/LABELS)	Labels
U99-11323	PSG 4-2	Cordset, male, Ø 8 mm (snap), 4-pin, straight, 2m * (I/O port)
U0883-63	PSW 4-2	Cordset, male, Ø 8 mm (snap), 4-pin, right-angle, 2m * (I/O port)
U2-11982	PSGK-MC (8/BAG)	Dust cap, male, Ø 8 mm (snap), (8/BAG)
A900101	PICOBX ADAPTOR PLATE, 4 PORT (1PACK)	Allows new picobox to utilize the previous version mounting hole locations.

* Other lengths available on request

Circuit Diagram

